


## DAT 3012

Modbus RTU IO Isolated  
on RS-485 network



### FEATURES

- Field-Bus remote data acquisition
- Modbus Slave device on RS-485
- Modbus RTU/Modbus ASCII Protocol
- 2 Isolated Universal Analogue Input
- 2 Analogue Outputs 0-20mA
- 4 Digital Inputs with pulse counters up to 3 kHz
- 3 SPST Relay Outputs
- Watch-Dog Alarm
- Remotely Configurable
- 1500 Vac galvanic isolation on all the ways
- High Accuracy
- DIN rail mounting in compliance with EN-50022

### GENERAL DESCRIPTION

The DAT 3012 device is able to acquire RTD or Tc sensors, mV, V or mA input signals connected to the universal analogue input in engineering units in digital format. Moreover it is available a second isolated analogue input for V or mA. The device is able to acquire up to 3 digital inputs and to drive one solid-state relay and two SPST relays. The Data are transmitted with MODBUS RTU/MODBUS ASCII protocol on the RS-485 network.

The device guarantees high accuracy and a stable measure versus time and temperature. To ensure the plant safety two Watch-Dog timer alarms are provided. The isolation between the parts of circuit removes eventual ground-loop effects, allowing the use of the device even in the heavy environmental conditions.

The device is housed in a rough self-extinguishing plastic container which, thanks to its thin profile of 22.5mm only, allows a high density mounting on EN-50022 standard DIN rail.

### USER INSTRUCTIONS

Before to install the device, please read the "Installation Instruction" section.

If the module configuration is unknown, with device powered off, connect the INIT terminal to the GND terminal (ground), at the next power on the device will be auto-configured in the default settings (refer to the User Guide of the device).

Connect power supply, serial bus, analogue and digital inputs and outputs as shown in the "Wiring" section.

When the device is powered, the green LED "PWR" is fixed in ON condition, the yellow LED "STS" changes state and depends on the working condition of the device: refer to the "Light Signalling" section to verify the device working state.

To perform configuration and calibration operations, read the instructions in the User Guide of the device.


To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.

### TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in the nominal conditions)


INPUT			Input Impedance			POWER SUPPLY			
Input type	Min	Max	mV, TC	10 MΩ	Volt	18 .. 30 Vdc	Reverse polarity protection	60 Vdc max	
<b>Voltage</b>			mA	22 Ω	<b>Current consumption</b>	100 mA max.			
100 mV	-100 mV	100 mV	<b>Thermal Drift (1)</b>		<b>ISOLATION</b>				
10 Volt	-10 V	10 V	Inputs - Full Scale	± 0.01 % / °C	(Power supply - RS485 – Universal input – V				
<b>TC</b>			<b>Thermal Drift CJC</b>		mA Input – Digital Inputs – Analogue Outputs )				
J	-210°C	1200°C	Full Scale	± 0.02 °C / °C	1500 Vac,				
K	-210°C	1370°C	<b>Sample time</b>	150 ms	50 Hz, 1 min				
R	-50°C	1760°C	<b>Warm-up time</b>	3 minutes	<b>ENVIRONMENTAL CONDITIONS</b>				
S	-50°C	1760°C	<b>OUTPUT (2 channels)</b>			Operative Temperature -10°C .. +60°C			
B	400°C	1825°C	<b>Output type</b>	<b>Min</b>	<b>Max</b>	UL Operative Temperature -10°C .. +40°C			
E	-210°C	1000°C	Current	0 mA	20 mA	Storage Temperature -40°C .. +85°C			
T	-210°C	400°C	<b>Accuracy (2)</b>			Humidity (not condensed) 0 .. 90 %			
N	-210°C	1300°C	<b>Linearity (2)</b>			Maximum Altitude 2000 m			
<b>RTD 2,3 wires</b>			<b>Thermal Drift (2)</b>			Installation Indoor			
Pt100	-200°C	850°C	<b>Load resistance</b>			Category of installation II			
Pt1000	-200°C	200°C	<b>Auxiliary Voltage</b>			Pollution Degree 2			
Ni100	-60°C	180°C	<b>Data Transmission</b>			<b>MECHANICAL SPECIFICATIONS</b>			
Ni1000	-60°C	150°C	<b>Baud Rate</b>			Material Self-extinguish plastic			
<b>Resistance 2,3 wires</b>			<b>Max. distance</b>			IP Code IP20			
Low	0 Ω	500 Ω	<b>DIGITAL INPUTS</b>			Wiring wires with diameter			
High	0 Ω	2000 Ω	<b>Number of Channels</b>			0.8±2.1 mm <sup>2</sup> /AWG 14-18			
<b>Potentiometer</b>			<b>Pulse Counters (32 bit)</b>			Tightening Torque 0.5 N m			
	20 Ω	50 kΩ	<b>Input voltage</b>			Mounting in compliance with DIN			
<b>Current</b>			<b>(bipolar)</b>			rail standard EN-50022			
20 mA	-20 mA	20 mA	<b>Input Impedance</b>			Weight about 150 g.			
<b>Accuracy (1)</b>			<b>DIGITAL OUTPUTS</b>			<b>CERTIFICATIONS</b>			
mV, Volt, mA	± 0.05 % f.s.		<b>N.3 Relays SPST</b>			<b>EMC ( for industrial environments)</b>			
Pot, RTD, Res.	± 0.05 % f.s.		<b>Maximum switching power per contact (resistive load)</b>			Immunity EN 61000-6-2			
TC	> ± 0.05 % f.s. or 5 uV		2 A @ 250 Vac			Emission EN 61000-6-4			
<b>Linearity (1)</b>			2 A @ 30 Vdc						
mV, Volt, mA	± 0.05 % f.s.		5Vdc, 10mA						
Pot, RTD, Res.	± 0.1 % f.s.		250Vac (50 / 60 Hz) ,						
TC	± 0.2 % f.s.		110Vdc						
<b>RTD, Res, Pot excitation current</b>			<b>Dielectric Strength between contacts</b>						
Typical	0.700 mA		1000 Vac, 50 Hz, 1 min.						
<b>Lead wire resistance influence</b>			<b>Dielectric Strength between coil and contacts</b>						
RTD/Res 3 wires(50 Ω max balanced)	0.05 f.s. %/Ω		4000 Vac, 50 Hz, 1 min.						
mV, Tc	< 0.8 uV/Ohm								
<b>CJC Compensation error</b>	± 1°C								
(1) Referred to input Span (difference between max. and min. values)									
(2) Referred to output Span (difference between max. and min. values)									

## WIRING


### ANALOG INPUT A - UNIVERSAL

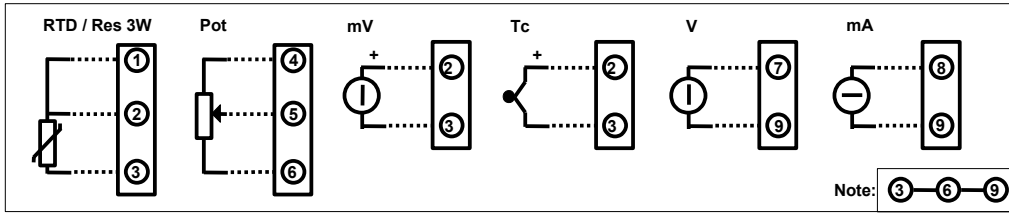


### ANALOG INPUT B - UNIVERSAL

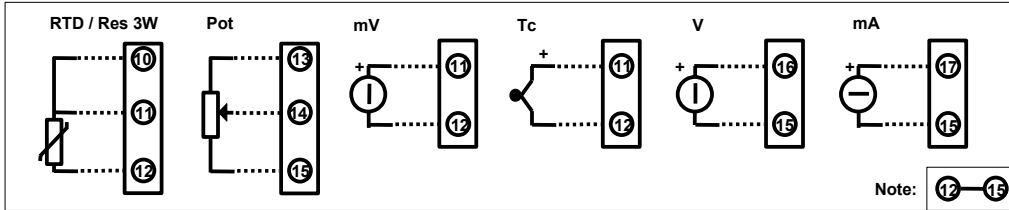


### ANALOG OUTPUTS - mA

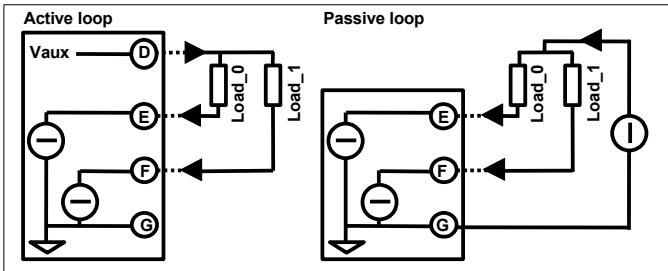


### DIGITAL OUTPUTS

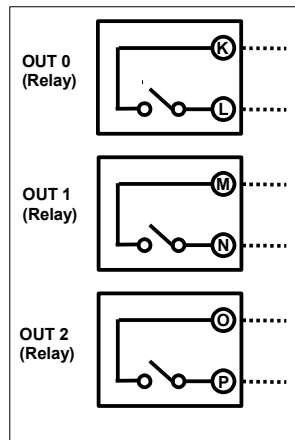


### RS-485




### POWER SUPPLY



### INIT



### DIGITAL INPUTS



## MODBUS REGISTERS MAPPING

Registro	Descrizione	Accesso
40001	--Reserved--	R/W
40002	Firmware Version	RO
40003		RO
40004	Name	R/W
40005		R/W
40006	--Reserved--	RO
40007	Address	R/W
40008	--Reserved--	RO
40009	Digital Input	RO
40010	Digital Output	R/W
40011	System Flags	R/W
40012	Enable PowerUp/Safe Dig. Out	R/W
40013	WatchDog Timer	R/W
40014÷18	--Reserved--	RO
40019	Communication	R/W
40020÷26	--Reserved--	RO
40027	Analog Input #1	RO
40028	Analog Input #2	RO
40029÷32	--Reserved--	RO
40033	Analog Output #1	R/W
40034	Analog Output #2	R/W
41204	Reset Digital Counter	R/W
41205	Freq. Digital input #0	RO
41206	Freq. Digital input #1	RO
41207	Freq. Digital input #2	RO
41208	Freq. Digital input #3	RO
41209÷10	Counter Digital input #0 (32bit)	R/W
41211÷12	Counter Digital input #1 (32bit)	R/W
41213÷14	Counter Digital input #2 (32bit)	R/W
41215÷16	Counter Digital input #3 (32bit)	R/W
41217	Input Type	R/W
41221	PowerUp Analog Output #1	R/W
41222	PowerUp Analog Output #2	R/W
41223	Safe Analog Output #1	R/W
41224	Safe Analog Output #2	R/W

## INSTALLATION INSTRUCTIONS

The device is suitable for fitting to DIN rails in the vertical position. For optimum operation and long life follow these instructions: **When the devices are installed side by side it may be necessary to separate them by at least 5 mm in the following case:**


- If panel temperature exceeds 45°C and at least one of the overload conditions exist.

Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel.

Install the device in a place without vibrations.

Moreover it is suggested to avoid routing conductors near power signal cables (motors, induction ovens, inverters etc...) and to use shielded cable for connecting signals.


## ISOLATIONS

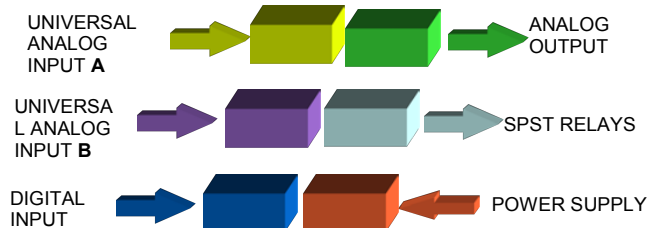

**LIGHT SIGNALLING**

LED	COLOR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered
		BLINK	Watch-dog Alarm
STS	YELLOW	OFF	Correct working
RX	RED	BLINK	Data receiving from RS-485
		OFF	No Data receiving
TX	RED	BLINK	Data Transmission on RS-485
		OFF	No Data Transmission
I(n)	RED	ON	Digital Input 'n' : ON State
		OFF	Digital Input 'n' : OFF State
R(n)	RED	ON	Digital Output 'n' : ON State
		OFF	Digital Output 'n' : OFF State

**MECHANICAL DIMENSIONS (mm)**

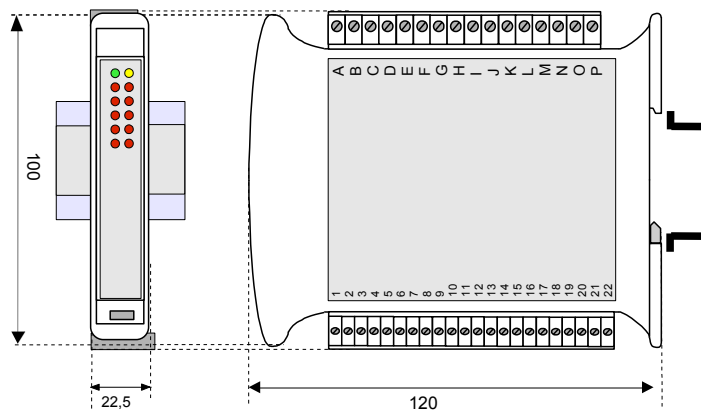


**AVAILABLE VERSIONS ON REQUEST**

The DAT3012 is available on request in non-standard versions. Each non-standard version is associated with a STDV code that will be communicated at the time of the request.

Available versions out of standard are:

- DAT3012 with 2 analog outputs 0-10V (instead of 2 current outputs 0-20mA)

 The symbol reported on the product indicates that the product itself must not be considered as a domestic waste. It must be brought to the authorized recycle plant for the recycling of electrical and electronic waste. For more information contact the proper office in the user's city, the service for the waste treatment or the supplier from which the product has been purchased.

**HOW TO ORDER (standard version)**  
DAT3012 can be supplied with the configuration specified by the customer.

**ORDER CODE:**

**DAT 3012 / [Pt100] / [20 mA]**

Input type channel 1       = Requested  
 Input type channel 2       = Optional

**HOW TO ORDER (not standard version)**  
DAT3012 can be supplied with the configuration specified by the customer. Refer to the "Available versions on demand" section for available standard versions.

**ORDER CODE:**

**DAT 3012 STDV XXXXXX / [Pt100] / [20 mA]**

Input type channel 1       = Requested  
 Input type channel 2       = Optional