

EXL6 OCS

Enhanced Screen, Faster Logic, Unprecedented Capabilities

The 6" OCS controller is now faster than ever with improved logic, higher screen resolution, and proven performance



Class I, Division 2
Groups A, B, C, D
Type 4X

Building Automation

- Improve occupant comfort
- Economical operation systems
- Reduce energy consumption

Material Handling

- Minimise HMI inefficiencies
- Track/log/catalogue data
- Increase overall productivity

Oil and Gas

- Maximise capacity utilisation
- Rationalise assets
- Maintain emission standards

Renewable Energy

- Data logging, remote access
- Sunlight and UV protection
- Durable, robust controllers

Water/Wastewater

- Operate chlorination systems
- Station pump control
- Remote water well controls

6" Colour Touchscreen

Utilising the same 5.7" opening as our XL6e, the new and improved EXL6 was engineered to incorporate intuitive functionalities and innovative features as previous models of our XL series of OCS controllers. The EXL6 LCD TFT Display is full colour with VGA resolution and provides virtually instantaneous updates. Low-temperature options are available as an add-on feature.

Full Ethernet Built into Every Unit

The EXL6 model has built-in 100Mbps Ethernet. The EXL6 Ethernet support includes an integrated Web Server, FTP Host, email, Modbus/TCP Master/Slave, Programming, and much more.

Online Programming & High-Speed USB 2.0


The EXL6 includes two USB 2.0 ports; Host port and an on-the-go port. The Host Port allows connection of removable FLASH drives, supporting drives up to 2TB. EXL6 Online Programming allows the logic program to be modified on-the-fly without entering stop mode.

Advanced High Speed Counter (>500kHz)

The channel High Speed Counter accepts frequencies exceeding 500kHz, supporting a variety of modes including Totalising, Quadrature, Pulse Measurement, Frequency Counting and Setpoint Controlled Outputs.

EXL6 Specifications

General Specifications		Control & Logic Specifications	
Required Power (steady state)	95mA @ 24 VDC; 190mA @ 12 VDC	Control Language Support	Adv. Ladder & Full IEC 1131-3
Primary Power Range	10-30Vdc	Logic Size (scan rate)	1MB, max (0.013ms/K)
Relative Humidity	5 to 95% Non-condensing	Online Programming	Supported in Adv. Ladder
Operating Temp	-40 to +60°C*	I/O References Supported	4096 Digital & 1024 Analog
Storage Temp	-40 to +70°C	General Purpose References	50,000 Words & 32,768 bits

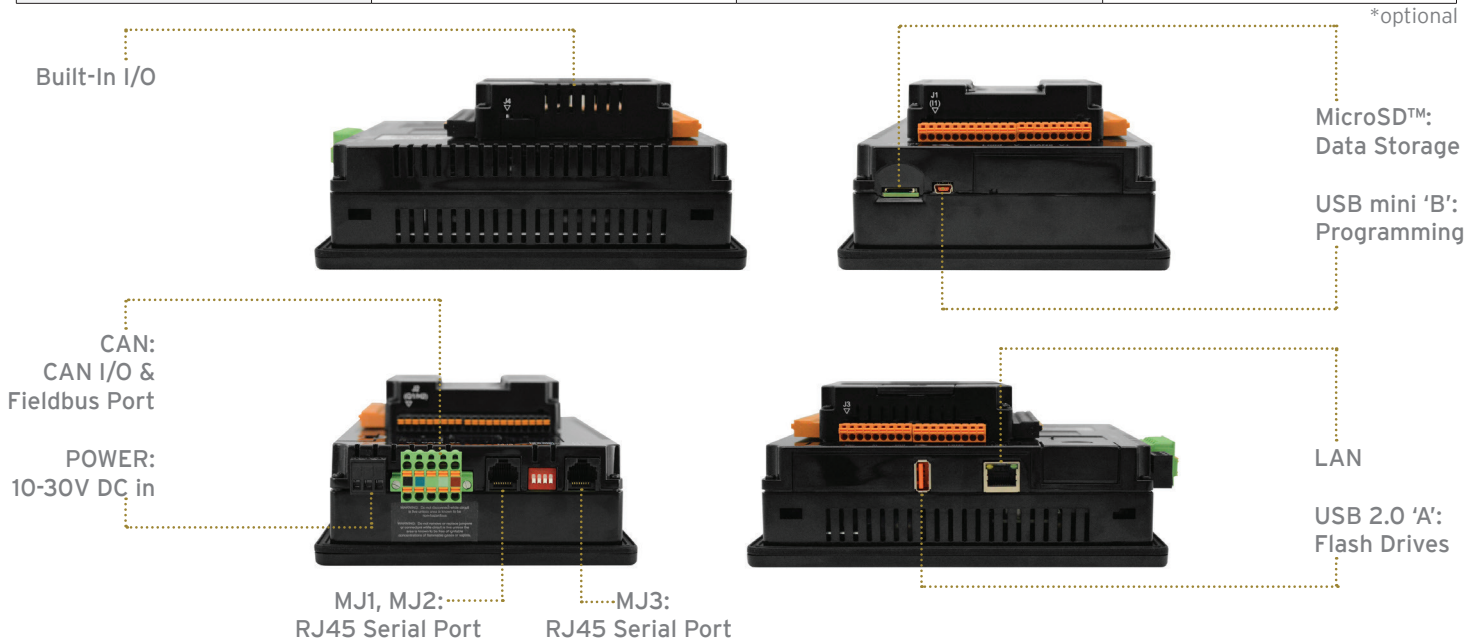


EXL6 Model Numbers

Part #	Description
HEXT371C100	No Built-in I/O
HEXT371C112	12 DC In, 6 Relay Out, 4 – 12-bit Analogue In
HEXT371C113	12 DC In, 12 DC Out, 2 – 12-bit Analogue In
HEXT371C114	24 DC In, 16 DC Out, 2 – 12-bit Analogue In
HEXT371C115	12 DC In, 12 DC Out, 2 – 14/16-bit Analogue In (mA/V/Tc/mV/RTD), 2 – 12-bit Analogue Out
HEXT371C116	12 DC In, 12 DC Out, 6 – 14/17-bit Analogue In (mA/V/Tc/mV/RTD), 4 – 12-bit Analogue Out



HE-EPK Programming Cable Kit Includes
 USB to Mini USB Adapter Cable
 USB to RS-232 Serial Adapter Cable
 RS-232 Serial to RJ45 Ethernet Adapter Cable

Expansion & Remote I/O and Accessories



SmartRail Modular I/O



SmartStix Terminal Block I/O



SmartBlock Specialty I/O



XL Series COM Options