



**SIDE ELECTROMAGNETIC LEVEL INDICATORS WITH ONE CONTACT AND M12 x 1.5 CONNECTION**

**USE:**

Made to ensure, with maximum safety, the minimum or maximum level of liquids in tanks compatible with the material of the level indicator.

**OPERATION:**


When the float of the indicator approaches the Reed switch at the pre-established point, the contact activated by the magnet housed in the float opens or closes, thus obtaining the possibility of sending a luminous or acoustic signal or activating or disconnecting any electrical equipment connected to it.

**FITTING:**

The indicator must be fitted in the side position at the required place to be controlled.

**IMPORTANT:**

To invert the contact from N.C. to N.O. just turn the level indicator 180°.

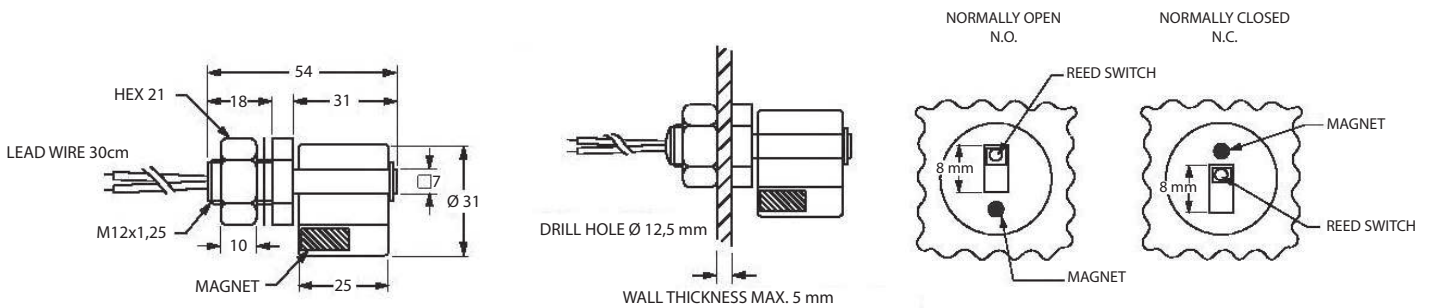

MODEL	MATERIAL	CONNECTION	ELECTRICAL CONTACTS	ELECTRICAL CHARACTERISTICS				CABLE	TEMP. °C	MAX. PRESSURE
				POWER COMMUTABLE IN D.C.	CURRENT STRENGTH	COMMUTABLE VOLTAGE	PROTECTION			
IEG - FCH11 PDA 03	PP	M12 x 1,5	SPST	50 W	0,5 A	200 VDC - 240 VAC	IP 65	30 cm	-20 +80	1