


# XL4 OCS

## The World's Most Advanced 1/4 DIN All-In-One Controller

A milestone product setting the standard for functionality and performance.

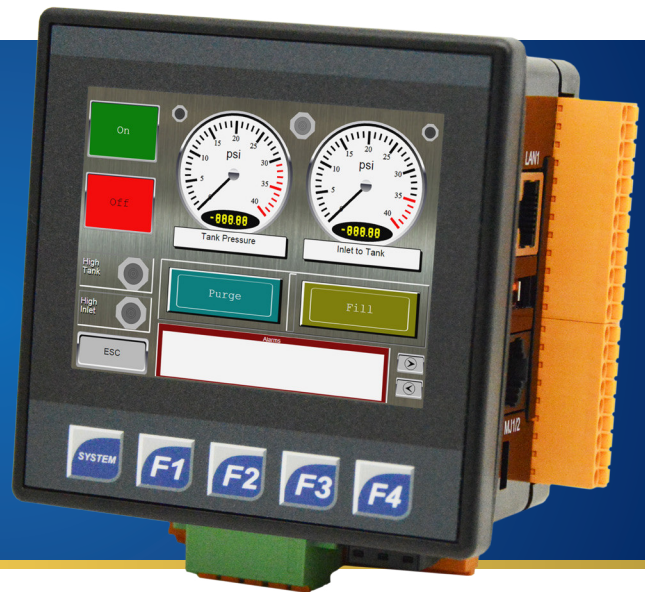

Class 1, Division 2  
Groups A, B, C, D  
Type 4X

### BENEFITS

- High performance logic controller with online programming
- 3.5" QVGA colour touchscreen for detailed graphics
- Built-in digital and analogue I/O with (2) 500kHz high-speed counters
- 10/100 Ethernet for e-mail, web serving, FTP and Modbus/TCP
- USB 2.0 ports for programming and FLASH drive support
- 32GB microSD slot for application updates and virtually unlimited data logging



### 3.5" COLOUR TOUCHSCREEN

The XL4 shares the same 1/4 DIN form factor as our extremely popular XLe and XLt. The XL4 LCD TFT Display is full colour with QVGA resolution and provides virtually instantaneous updates. Sunlight readable transfective and low-temperature versions are optional.

### FULL ETHERNET BUILT INTO EVERY UNIT

The XL4 model has built-in 100Mbps Ethernet. The XL4 Ethernet support includes an integrated Web Server, FTP Host, email, Modbus/TCP Master/Slave, Programming and much more.

### ONLINE PROGRAMMING & HIGH-SPEED USB 2.0

The XL4 includes two USB 2.0 ports; Host port and an on-the-go port. The Host Port allows connection of removable FLASH drives, supporting drives up to 2TB. XL4 Online Programming allows the logic program to be modified on-the-fly without entering stop mode.

### ADVANCED HIGH SPEED COUNTER (>500KHZ)

The 2-channel High Speed Counter accepts frequencies exceeding 500kHz, supporting a variety of modes including Totalising, Quadrature, Pulse Measurement, Frequency Counting and Setpoint Controlled Outputs.

### WEBOS COMPATIBILITY

With Horner WebMI, you can monitor and control plant data from the palm of your hand. Published directly from the OCS Controller, WebMI allows the same or unique Web pages to be monitored and controlled from your computer, tablet or other connected device. Developed completely within our Cscape environment, WebMI allows for state-of-the-art HTML5 development without the need for web programming skills. The licensing and registration process is quick and simple while the benefits and affordability of WebMI will truly change your world.

### EASY TO CONFIGURE DATA LOGGER

All of our OCS products can quickly and easily be configured for data logging. It only takes a few steps within Cscape to set up the data and frequency with which data can be logged to the on-board microSD card. Utilising the data is just as simple - email, text, or even allow files to be transferred (.csv) via FTP.

XL4 with -106 I/O Option Board shown above

## SPECIFICATIONS AND TECHNICAL INFORMATION

GENERAL SPECIFICATIONS		CONTROL & LOGIC SPECIFICATIONS		
Required Power (steady state)	95mA @ 24 VDC; 190mA @ 12 VDC	Control Language Support	Advanced Ladder Logic; Full IEC 1131-3 languages	
Required Power (inrush)	2A for <1ms @ 24 VDC; DC switched	Logic Program Size	1MB, maximum	
Primary Power Range	10 - 30 VDC	Logic Scan Rate	0.013ms/K	
Relative Humidity	5 to 95% non-condensing	Online Programming Changes	Supported in Advanced Ladder	
Clock Accuracy	+/-20ppm max @ 25°C (+/-1 minute per month)	I/O Support	Digital Inputs	2048
Storage Temperature	-30°C to +70°C		Digital Outputs	2048
Operating Temperature*	-10°C to +60°C		Analogue Inputs	512
Weight	12 oz. (340 g)	General Purpose Registers	Analogue Outputs	512
Dimensions (L x W x H)	3.780" [96mm] x 3.780" [96mm] x 2.264" [57.5mm]		50,000 (words) retentive	
UL/CE Compliance	US: <a href="http://www.heapg.com/content/21-certifications">http://www.heapg.com/content/21-certifications</a> Europe: <a href="http://www.horner-apg.com/en/support/certification.aspx">http://www.horner-apg.com/en/support/certification.aspx</a>			

\*Operating temperatures below -10°C are supported by adding -22 option at time of order

DISPLAY SPECIFICATIONS		CONNECTIVITY	
Display Type	3.5" TFT Transmissive Colour	Serial Ports	1 - RS232 & 1 - RS485 on single modular jack
Resolution	QVGA (320x240)	USB mini-B	USB 2.0 (480MHz) Programming & Data Access
Colour	16-bit (65,535)	USB A	USB 2.0 (480MHz) Programming & Data Access
Screen Memory	64MB	CAN	Remote I/O, Peer-to-Peer Comms, Cscape
User-Programmable Screens	1023	Ethernet	10/100Mb (Auto-MDX) Modbus TCP C/S. HTTP, FTP, SMTP, Cscape
Backlight	LED (50,000 hours)		Remote I/O
Screen Update Rate	User configurable within the scan time (perceived as instantaneous in many cases)	Removable Memory	MicroSD, support for >32GB max

INPUT / OUTPUT CONNECTIVITY													
MODEL	DC In	DC Out	Relays	HS In	HS Out	mA/V In	mA/V RTD/Tc	mA/V Out	HIGH SPEED COUNTERS				
Model 2	12		6	4		4			Number of Counters	2			
Model 3	12	12		4	2	2			Maximum Frequency	>500kHz			
Model 4	24	16		4	2	2			Accumulator Size	32-bits each			
Model 5	12	12		4	2		2	2	MODES SUPPORTED				
Model 6	12	12		4	2		6	4					
There are 2 high-speed inputs of the total DC inputs. There are 2 high-speed outputs of the total DC outputs. Model 2, 3 & 4 feature 12-bit analogue I/O. Model 5 features 14/16-bit analogue I/O. Model 6 features 14/17-bit analogue I/O. High-speed outputs can be used for PWM and Pulse Train outputs, currently limited to <65kHz.									Totalizer	Quadrature	Pulse Meas.	Frequency Meas.	
										2 position controlled outputs; 1 ON/OFF setpoint per output			

### XL4 MODEL NUMBERS

Part #	Description
HEXT251C100	No Built-in I/O
HEXT251C112	12 DC In, 6 Relay Out, 4 12-bit Analogue In
HEXT251C113	12 DC In, 12 DC Out, 2 12-bit Analogue In
HEXT251C114	24 DC In, 16 DC Out, 2 12-bit Analogue In
HEXT251C115	12 DC In, 12 DC Out, 2 14/16-bit Analogue In (mA/V/Tc/mV/RTD), 2 12-bit Analogue Out
HEXT251C116	12 DC In, 12 DC Out, 6 - 14/17-bit Analogue In (mA/V/Tc/mV/RTD), 4 - 12-bit Analogue Out

### EXPANSION & REMOTE I/O AND ACCESSORIES



SmartRail Modular I/O



XL Series COM Options



SmartStix Terminal Block I/O



SmartBlock Specialty I/O



HE-EPK Programming Cable Kit Includes

USB Cable  
Ethernet Cable  
RS-232 Cable  
USB/RS-232 Adapter