


FLOW SWITCH Series FCS-01

Design Features

- Rugged High Grade Noryl
- Minimal pressure drop
- Operates from a small head of water
- Mount in any axis
- Suitable for water and air flow switching

Product Comments

- 3/8" BSP Male threaded fittings
- Suitable for hot and cold portable water
- Reed Switch reliability
- Meets UL 94-HB flammability rating
- Easy installation
- Food Grade Material

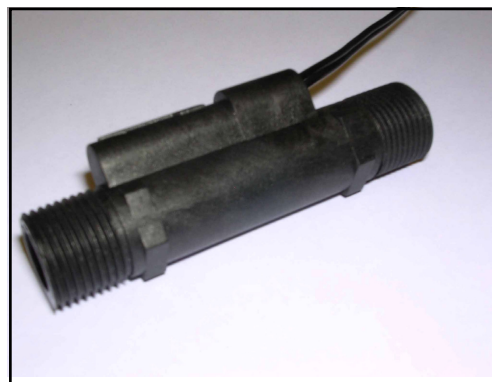

Typical Applications


- Leak Detection
- Flow Sensing
- Mains water control
- Cooling systems
- Circulating Pump Protection

Material, Design and Operation

Mounting:	Flow Switch Vertical or Horizontal
Material:	Noryl
Fitting	Flow Switch 3/8" BSP
Contact Form:	Form A -SPST Normally Open
Contact Material:	Ruthenium
Maximum Watts	15 Watts
Maximum Switching Volts:	250VAC
Maximum Switching Current:	1.0 A
Cable Type:	2 x 22AWG, 16/0.2mm PVC insulated 0.5m long to UL/CSA/BS6361
Cable Colour:	Black/Black
Operating Temperature Range:	85 °C
Medium/Liquid:	Water
Flow Rate:	0.6 litres/min
Operating Pressure:	10 BAR
Mounting Shock:	50g for 11ms duration
Mounting Vibration:	35g up to 500Hz
Approvals:	Meets UL 94-HB flammability rating

Installation

- Pipework to be cut square and burr free
- Compression fitting mating connectors to be of suitable quality.
- The installation should be checked to ensure that no leaking is evident.
- Pipework/connector alignment imperative (avoiding bending stress).

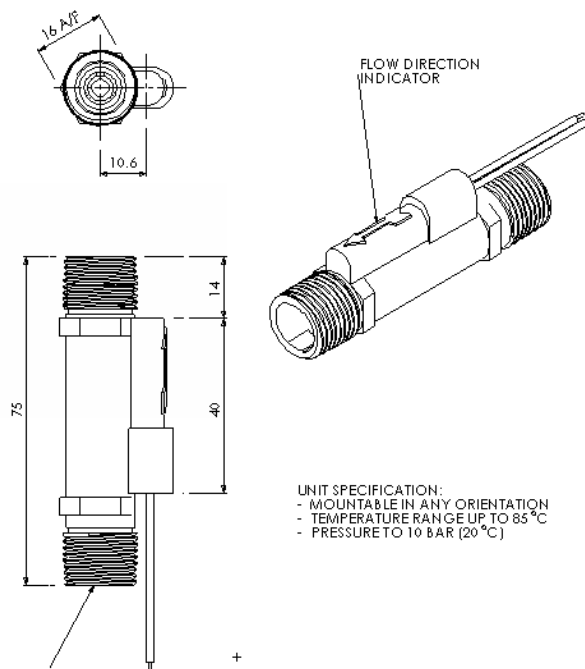

UNIT SPECIFICATION:
 - MOUNTABLE IN ANY ORIENTATION
 - TEMPERATURE RANGE UP TO 85 °C
 - PRESSURE TO 10 BAR (20 °C)