

DISPLAY PRESSURE SWITCH Serie DPC 8380

The DPC 8380 is the ideal combination of pressure switch and transmitter with pressure display. The parameters are set on the device or in a timesaving way via an NFC - smartphone App. The settings in combination with a comprehensive set of options make the DPC 8380 suitable for a wide range of industrial applications.

Applications

- Machine tools
- HVAC
- Refrigeration
- Water treatment
- Process technology

Features

- Parameterization also via NFC-smartphone App (Android)
- Display and electrical connection are independently rotatable 335°/343°
- Analogue output switchable mA or V
- Integrated datalogger
- Measuring range adjustable

Technical Data			
Measuring principle	Thick-film-on-ceramic	Accuracy @ 25°C typ.	± 0.5 % FS typ. ± 0.3 % FS typ.
Measuring range	0 ... 0.2 to 0 ... 100 bar 0 ... 2.5 to 0 ... 1500 psi adjustable	Media temperature	-25°C ... +85°C
Output signal	4 ... 20 mA, 0 ... 5 VDC, 1 ... 6 VDC, 0 ... 10 VDC, switchable mA or V	Ambient temperature	-25°C ... +85°C
NLH @ 25°C (BSL) typ.	± 0.2 % FS typ.	Pressure unit for display	bar, psi, MPa, kPa, mWC, mmWC, inchWC, %, user scale
Switching output	2 transistors PNP	Logger	Ring buffer: 3518 data points Sampling time: 0.1 ... 999.9 s, Off (0)

Ordering information/type code

				8380 .	XX	XX	XX	XX	XX	
Measuring range ¹⁾	Pressure measurement range [bar]	Over pressure [bar]	Burst pressure [bar]	Pressure measurement range [psi]	Over pressure [psi]	Burst pressure [psi]				
	0 ... 0.2	1.2	2	0 ... 2.5	15	30	F8			
	0 ... 0.4	1.2	2	0 ... 5	15	30	F9			
	0 ... 0.6	1.2	2	0 ... 10	20	30	G0			
	0 ... 1	2	4.8	0 ... 15	45	70	G1			
	0 ... 1.6	3.2	4.8	0 ... 20	45	70	G3			
	0 ... 2.5	5	7.5	0 ... 30	60	90	G5			
	0 ... 4	8	12	0 ... 50	100	150	G6			
	0 ... 6	12	15	0 ... 100	200	250	G7			
	0 ... 10	20	25	0 ... 150	300	375	G8			
	0 ... 16	32	40	0 ... 250	500	625	G9			
	0 ... 25	50	75	0 ... 400	800	1200	H0			
	0 ... 40	80	100	0 ... 500	1000	1250	H1			
	0 ... 60	120	180	0 ... 1000	2000	3000	H2			
	0 ... 100	200	300	0 ... 1500	3000	4500	H3			
	Sensor	Relative pressure, 1.4305, accuracy: 0.5 %			Absolute pressure, 1.4305, accuracy: 0.5 % ³⁾			57	87	
		Relative pressure, 1.4404/1.4435, accuracy: 0.5 % ⁴⁾			Absolute pressure, 1.4404/1.4435, accuracy: 0.5 % ^{3) 4)}			59	89	
		Relative pressure, 1.4462, accuracy: 0.5 % ⁴⁾			Absolute pressure, 1.4462, accuracy: 0.5 % ^{3) 4)}			52	82	
		Relative pressure, titanium grade 5, accuracy: 0.5 % ⁴⁾			Absolute pressure, Titanium Grade 5, accuracy: 0.5 % ^{3) 4)}			53	83	
Relative pressure, 1.4305, accuracy: 0.3 % ⁸⁾			Absolute pressure, 1.4305, accuracy: 0.3 % ⁸⁾			54	84			
Relative pressure, 1.4404/1.4435, accuracy: 0.3 % ^{4) 8)}			Absolute pressure, 1.4404/1.4435, accuracy: 0.3 % ^{4) 8)}			56	86			
Relative pressure, 1.4462, accuracy: 0.3 % ^{4) 8)}			Absolute pressure, 1.4462, accuracy: 0.3 % ^{4) 8)}			50	80			
Relative pressure, titanium grade 5, accuracy: 0.3 % ^{4) 8)}			Absolute pressure, titanium grade 5, accuracy: 0.3 % ^{4) 8)}			51	81			
Pressure connection	G1/4" female						10			
	G1/4" male						17			
	G1/2" male DIN3852-E ⁴⁾						41			
	1/4" NPT male ⁴⁾						30			
	R1/4" male, DIN3858 ⁴⁾						19			
	7/16"-20UNF male, DIN3866 ^{3) 4)}						18			
	7/16"-20UNF female, SAE J512 with valve opener ^{3) 4)}						24			
	7/16"-20UNF male, SAE4 (J1926) ⁴⁾						42			
	9/16"-18UNF male, SAE6 (J1926), seal: accessory 61 ^{2) 4)}						61			
G3/4" frontal membrane ^{4) 6)}						52				
Electrical connection	Male electrical connector M12x1, 4-pole, Mat. PA (Accessories P3, P4)						32			
	Male electrical connector M12x1, 5-pole, Mat. PA (Accessories P1, P2)						35			
Output signal	Switching output PNP, current output 4 ... 20 mA, switchable to 0 ... 10 VDC; output detail see accessories P1, P2, P3							PA		
	Switching output PNP, voltage output 1 ... 6 VDC; output detail see accessories P1, P2, P3							PU		
	Switching output PNP, voltage output 0 ... 10 VDC; output detail see accessories P1, P2, P3							PV		
	Switching output PNP, voltage output 0 ... 5 VDC; output detail see accessories P1, P2, P3							PW		
	Switching output PNP; output detail see accessory P4							PS		

Accessories	Pin configuration 5-pole.; 1: U+, 2: analogue, 3: U-, 4: SP1, 5: SP2	P1
	Pin configuration 5-pole.; 1: U+, 2: SP2, 3: U-, 4: SP1, 5: analogue	P2
	Pin configuration 4-pole.; 1: U+, 2: analogue, 3: U-, 4: SP1	P3
	Pin configuration 4-pole.; 1: U+, 2: SP2, 3: U-, 4: SP1	P4
	Pressure peak damping element ø 1.0 mm, material 1.4305 ⁷⁾	40
	Pressure peak damping element ø 0.4 mm, material 1.4305 (sensors 57, 87) resp. 1.4404 (sensors 52, 53, 59, 82, 83, 89) ⁷⁾	44
	Seal FPM, -18°C ... +125°C	61
	Seal EPDM, -40°C ... +125°C	63
	Female electrical plug M12x1, 5-pole ⁵⁾	33
	Parameterization standard for output signal PS (see table "Parameters")	ZS
	Parameterization according to customer specification (see table "Parameters")	ZC
	Function package 1: Zero set / Measuring range zero point adjustment	Z1
	Function package 2: User scale unit / analogue output adjustment	Z2
	Protective cap, 1 pc. F89051, package of 5 pcs. F89052, package of 25 pcs. F89075	
	Adapter with flange connection, 1 pc. F82054	

¹⁾ Extended overpressure as well as customized pressure ranges upon request

²⁾ Only for sensors 59 and 89

³⁾ Max. 40 bar or 500 psi

⁴⁾ Upon request

⁵⁾ For electrical connections 32 and 35

⁶⁾ Not for sensors 57 and 87, only for pressure ranges ≤ 25 bar or 400 psi

⁷⁾ Not for pressure connections 10, 18, 24, 52

⁸⁾ Only for pressure ranges 0 ... 0.4 to 0 ... 40 bar or 0 ... 5 to 0 ... 500 psi

Standard products (extra short lead time)


Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Supply [VDC]	Accuracy @ 25°C typ. [%]
DPC0.2PAP1	8380 68 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 0.2	1.2	15 ... 30	± 0.5
DPC0.4PAP1	8380 69 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 0.4	1.2	15 ... 30	± 0.5
DPC0.6PAP1	8380 70 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 0.6	1.2	15 ... 30	± 0.5
DPC1.0PAP1	8380 71 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 1	2	15 ... 30	± 0.5
DPC1.6PAP1	8380 73 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 1.6	3.2	15 ... 30	± 0.5
DPC2.5PAP1	8380 75 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 2.5	5	15 ... 30	± 0.5
DPC4.0PAP1	8380 76 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 4	8	15 ... 30	± 0.5
DPC6.0PAP1	8380 77 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 6	12	15 ... 30	± 0.5
DPC10.0PAP1	8380 78 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 10	20	15 ... 30	± 0.5
DPC16.0PAP1	8380 79 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 16	32	15 ... 30	± 0.5
DPC25.0PAP1	8380 80 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 25	50	15 ... 30	± 0.5
DPC40.0PAP1	8380 81 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 40	80	15 ... 30	± 0.5
DPC60.0PAP1	8380 82 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 60	120	15 ... 30	± 0.5
DPC100.0PAP1	8380 83 5717 35 0000 0000 PA P1 44 61 ZS Z1 Z2	0 ... 100	200	15 ... 30	± 0.5

Parameters				
Name	Standard setting (accessory ZS)	Value range	Short name	Customer adjustment (accessory ZC)
Switch point SP1 (hysteresis mode) Upper switch point FH1 (window mode)	75 % Measuring range	SP1 > RP1 FH1 > FL1 Hysteresis ≥ 1 % FS	SP1	
Reset point RP1 (hysteresis mode) Lower switch point FL1 (window mode)	25 % Measuring range	RP1 < SP1 FL1 < FH1 Hysteresis ≥ 1 % FS	RP1	
Switch point SP2 (hysteresis mode) Upper switch point FH2 (window mode)	75 % Measuring range	SP2 > RP2 FH2 > FL2 Hysteresis ≥ 1 % FS	SP2	
Reset point RP2 (hysteresis mode) Lower switch point FL2 (window mode)	25 % Measuring range	RP2 < SP2 FL2 < FH2 Hysteresis ≥ 1 % FS	RP2	
Switch point delay time SP1 (hysteresis mode) Switch point delay time FH1 (window mode)	0	0 ... 99.99 s	ds1	
Switch point delay time RP1 (hysteresis mode) Switch point delay time FL1 (window mode)	0	0 ... 99.99 s	dr1	
Switch point delay time SP2 (hysteresis mode) Switch point delay time FH2 (window mode)	0	0 ... 99.99 s	ds2	
Switch point delay time RP2 (hysteresis mode) Switch point delay time FL2 (window mode)	0	0 ... 99.99 s	dr2	
Functions switching output 1	Hysteresis, closer (Hno)	Hysteresis NO (Hno), Hysteresis NC (Hnc) Window NO (Fno), Window NC (Fnc)	ou1	
Functions switching output 2	Hysteresis, closer (Hno)	Hysteresis NO (Hno), Hysteresis NC (Hnc) Window NO (Fno), Window NC (Fnc)	ou2	
Pressure units	bar	bar, psi, MPa, kPa, mWC, inchWC	uni	
Measuring range adjustment	100 % Nominal pressure	50 ... 100 % Nominal	P_EP	
Damping (analogue output)	0.01 s	0.01 ... 3.00 s (time constant)	dAA	
Display rotation	No	no, yes (180°)	disr	
Display mode	Current pressure value	Pressure value: current, highest, lowest, display off Current value: decimal places selectable (max. 3)	dis	
Display actualisation	2	1, 2, 5, 20 Hz	duPd	


Specifications		
Electrical Data	Output / supply voltage	4 ... 20 mA: 24 (15 ... 30) VDC 0 ... 5 VDC: 24 (15 ... 30) VDC 1 ... 6 VDC: 24 (15 ... 30) VDC 0 ... 10 VDC: 24 (15 ... 30) VDC
	Power-on delay time	Typ. 200 ms
	Inverse-polarity protection, short-circuit strength @ 25°C during 5 min.	integrated
	Current consumption	≤ 30 mA
Environmental conditions	Media temperature	-25°C ... +85°C
	Ambient temperature	-25°C ... +85°C
	Protection ¹⁾	IP67
	Humidity	Max. 95 % relative
	Vibration	10 g (10 ... 2000 Hz)
	Shock	50 g / 3 ms
EMC Protection	Emission	EN/IEC 61000-6-3
	Immunity	EN/IEC 61000-6-2
Mechanical Data	Sensor (wetted parts)	Ceramic, Al ₂ O ₃ (96 %)
	Pressure connection (wetted parts)	57/87: 1.4305 (AISI303) 59/89: 1.4404/1.4435 (AISI316L) 52/82: 1.4462 (AISI318LN) 53/83: Titanium Grade 5
	Housing	Zinc based die-casting alloy, nickel plated display housing plastic
	Sealing	FPM, EPDM
	Male electrical connector	See ordering information
	Weight	~ 189 g
	Mounting torque	15 ... 20 Nm
	Housing alignment	Display 335° rotatable, max. 2.5 Nm Electrical connection 343° rotatable, max. 5 Nm

¹⁾ See electrical connection

Measuring accuracy 0.5 %

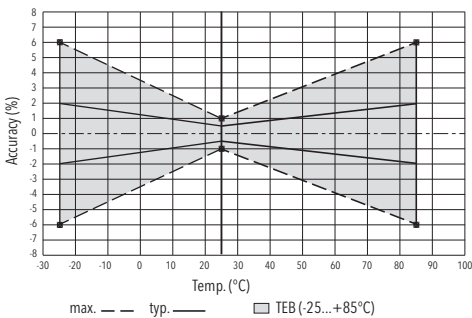

Measuring accuracy 0.3 %

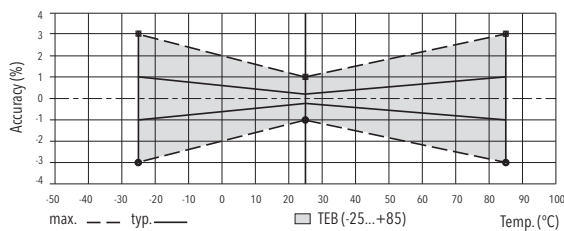

Analogue output				
			Measuring accuracy 0.5 %	Measuring accuracy 0.3 %
Output signal	Switchable 4 ... 20 mA or voltage			
Accuracy	TEB @ -25 ... +85°C	[% FS typ.]	± 2.0	± 1.0
	Accuracy @ +25°C	[% FS typ.]	± 0.5	± 0.3
	NLH @ +25°C (BSL)	[% FS typ.]	± 0.2	± 0.2
	TC zero point and span	[% FS/K typ.]	± 0.03	± 0.02
	Long term stability 1 year	[% FS typ.]	± 0.3	± 0.2
Current limiting output signal	4 ... 20 mA: 25 mA (overload) 0 ... 10 VDC: < 40 mA (short-circuit)			
Damping (rise time)	0.01 ... 3.00 s / 10 ... 90 % Nominal pressure			
Zero set; ¹⁾ Offset correction of analogue output and display indication	± 0.2 % FS			
Measuring range zero point adjustment (P_nP) ¹⁾	0 ... 50 % FS ²⁾			
Measuring range end point adjustment (P_EP)	50 ... 100 % FS ²⁾			
Zero point adjustment analogue output (o_nP) ¹⁾	Voltage output: 0 ... 2 VDC Current output: 3.9 ... o_EP - 8 mA			
End point adjustment analogue output (o_EP) ¹⁾	Voltage output: o_nP + 4 ... 10.5 VDC Current output: o_nP + 8 ... 20.1 mA			

¹⁾ Available with optional function package, see "Accessories"


²⁾ P_EP - P_nP ≥ 50 % FS

Switching output				
			Measuring accuracy 0.5 %	Measuring accuracy 0.3 %
Accuracy	Accuracy @ +25°C	[% FS typ.]	± 0.5	± 0.3
	TEB @ -25 ... +85°C	[% FS typ.]	± 2.0	± 1.0
	Long term stability 1 year	[% FS typ.]	≤ ± 0.3	± 0.2
Setting range of switchpoints	0 ... 100 % FS			
Switching hysteresis	≥ 1 % FS			
	Switchpoint > reset point			
Switching resistance	≤ 3 Ω			
Output function	Hysteresis, Window; normally closed (NO), normally open (NC)			
Switching current	≤ 0.5 A each switching output			
Current limiting	≤ 2 A each switching output			
Switching frequency	max. 200 Hz			
Delay time	0 ... 99.99 s			



Display	
Display	4-digit 7-segment display 180° flippable with disable function Standard decimal places: ≤ 9: 3 decimal places 10 ... 99: 2 decimal places 100 ... 999: 1 decimal place
Switching status indication	2 LED, red
Operation	With 3 buttons and menu navigation according to VDMA 24574-1
Display resolution	0.1 % FS
Display range	-3 ... 103 % FS
Setting parameters	See table Parameters
User scale unit; User defined values for display indication zero point and end point ¹⁾	Display zero point: -999 ... 9998 Display end point: -998 ... 9999

¹⁾ Available with optional function package, see "Accessories"


Dimensions

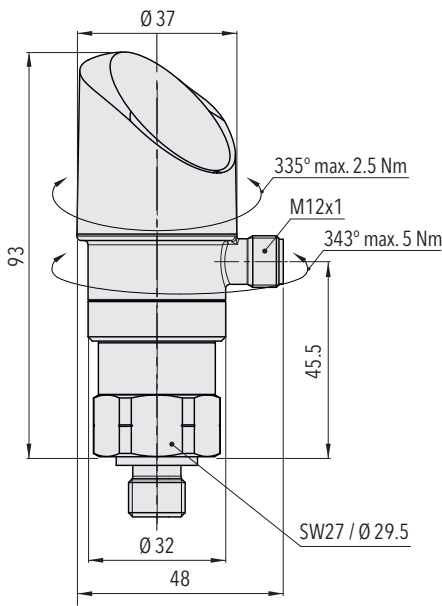


8380.XX.XXXX.35/32.XX.XX

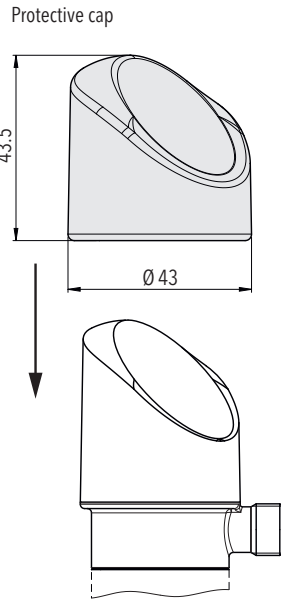


F82054
Mounting accessory
included




8380.XX.XX10.XX.XX.XX




8380.XX.XX17.XX.XX.XX




8380.XX.XX41.XX.XX.XX




8380.XX.XX30.XX.XX.XX




8380.XX.XX19.XX.XX.XX




8380.XX.XX18.XX.XX.XX





8380.XX.XX24.XX.XX.XX




8380.XX.XX42.XX.XX.XX




8380.XX.XX61.XX.XX.XX



8380.XX.XX52.XX.XX.XX




Welding flange (AISI 316L)
for G3/4" frontal membrane
Ordering No. C27805



8380.XX.XXXX.XX.XX.33


Electrical connection

		Protection / electrical connection			
		IP67*)			
		M12x1			
		5-pole 35		4-pole 32	
Output signal		P1	P2	P3	P4
	PA	✓	✓	✓	
	PU	✓	✓	✓	
	PV	✓	✓	✓	
	PW	✓	✓	✓	
	PS				✓
Pin Configuration		P1	P2	P3	P4
	U _S + U _S - Out analogue SP1 SP2 Shield *** 8380.xx.XXXX.xx.PA/PU/PV/PW/PS	1 3 2 4 5 Shield *** Shield ***	1 3 5 4 2 Shield ***	1 3 2 4 Shield ***	1 3 - 4 2 Shield ***



Connection of loads to switching output

*) Provided female electrical plug is mounted according to instructions
 ***) Die Verwendung eines abgeschirmten Kabels wird empfohlen

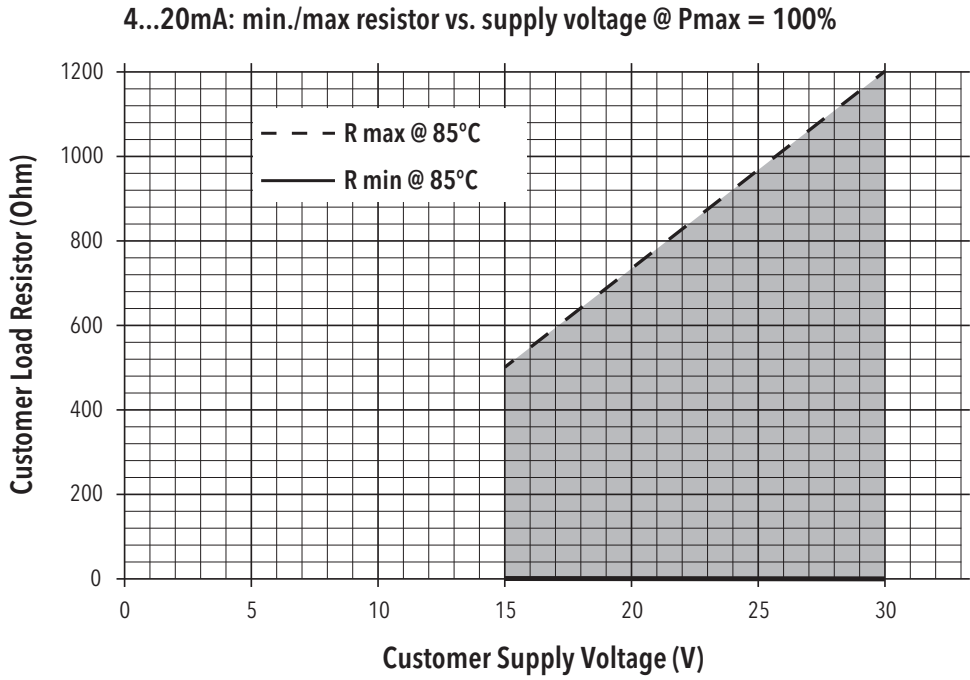

Functions switching output

