


PNEUMATIC LEVEL SWITCHES






RL/PN 1"
Aluminium

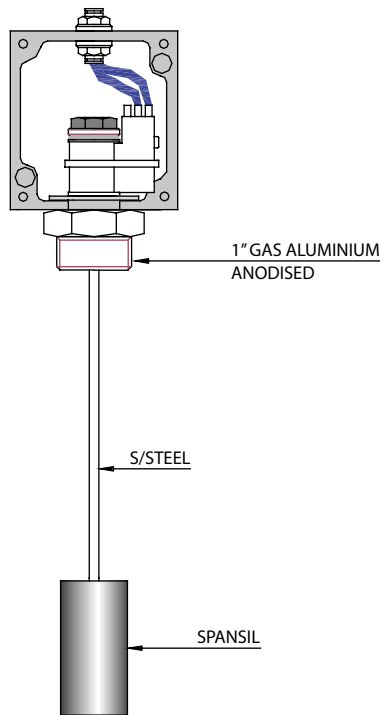

RL/PN 1.1/2"
Stainless Steel

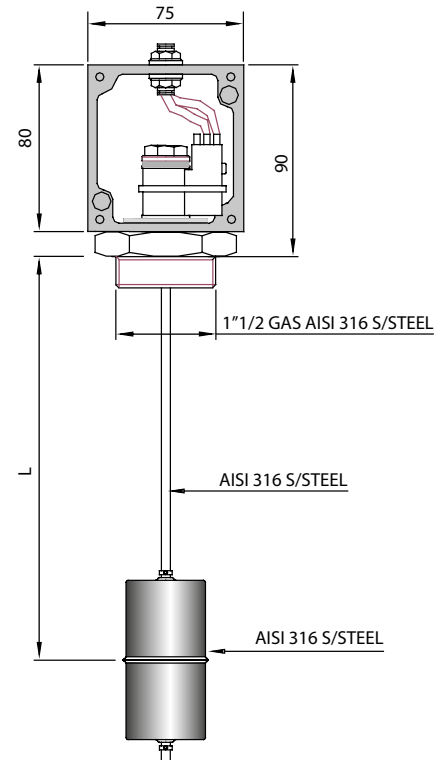

PNEUMATIC CONTROL LEVEL SWITCH WITH ADJUSTABLE SWITCHING POINT

Maximum working pressure: 10Bar.

- INDICATION BY MEANS OF MAGNETIC-OPERATION PNEUMATIC VALVE
- IP65 ADJUSTABLE PROTECTION BOX WITH INLET AND OUTLET QUICK COUPLINGS
- VALVE OPENING OBTAINABLE IN PRESENCE OR ABSENCE OF LIQUID
- QUICK AND EASY ADJUSTMENT OF SWITCHING POINT, LIKE FOR THE ENTIRE "RL" RANGE

MODEL	PROCESS CONNECTION		PNEUMATIC VALVE		ROD		FLOAT		CALM TUBE		OPERATING TEMPERATURE		BOX		
					L	MATERIAL									
RL/PN	1"	1" GAS ALUMINIUM	S1	PNEUMATIC VALVE OPENING IN THE ABSENCE OF LIQUID - WORK RANGE FROM 2 TO 6 BAR	FROM 90 TO 1000	S	AISI 304 STAINLESS STEEL	S	STANDARD NBR FOR PROCESS CONNECTION 1"	S	NOT PRESENT	S	-15...+60°C	1	ALUMINUM IP65
	1 1/2"	1" 1/2 GAS AISI 316 STAINLESS STEEL	S1A	PNEUMATIC VALVE OPENING IN THE PRESENCE OF LIQUID - WORK RANGE FROM 2 TO 6 BAR		I	AISI 316 STAINLESS STEEL	I	Ø42x83 AISI 316 STAINLESS STEEL WITH STANDARD AISI 316 STAINLESS STEEL STOPS WITH PROCESS CONNECTION 1 1/2"	I	PRESENT IN AISI 316 STAINLESS STEEL				
RL/PN	1"		S1		500	S		S		S		S		1	



adjustable rod length

horizontal or vertical mounting

air compressed powered level switch

40 micron filter suggested

Fittings for 4mm pipes

Pressure range 2...5 bar / 29...87 psi

Max liquid temperature 150°C

Ambient temperature -15°C...+60°C

Float and rod in AISI304



Case in aluminium

Flanged DN50 PN10

Pressure max 1 bar

Float diam.53x153mm in AISI316

Rod dimension 5x200mm

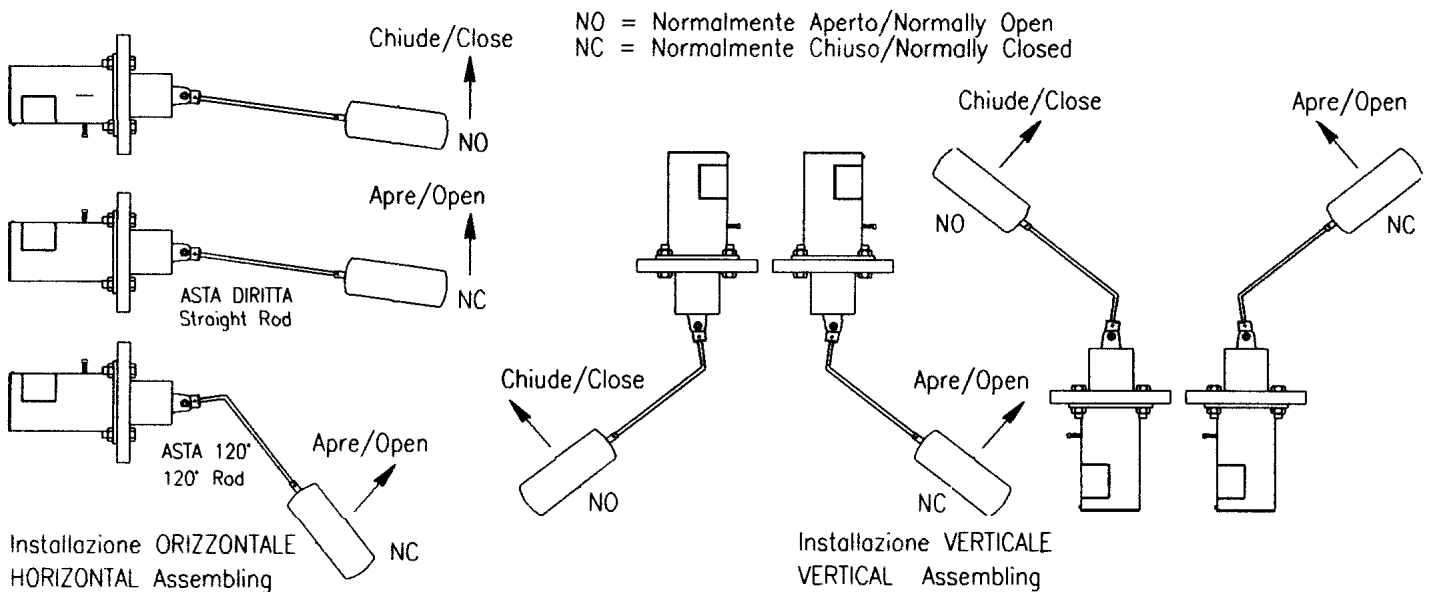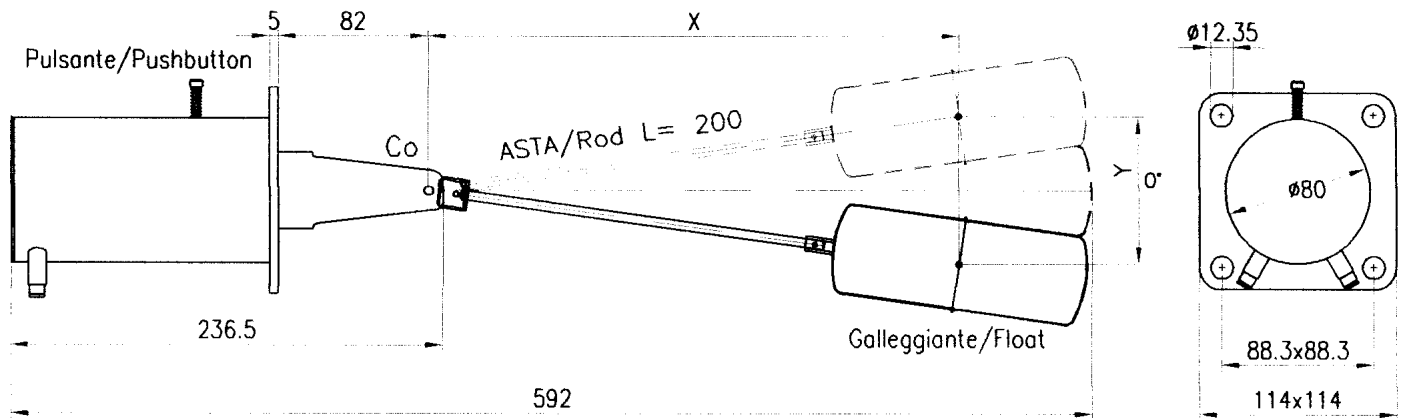



via Aosta, 4/B 09126 Cagliari (CA) ITALY

Tel +39 070-402252 Fax +39 062-3314562

www.imsystem.com info@imsystem.com