


- Off-line probe holders for closed amperometric cells
- With flow level control, proximity switch and capacity stabilizer (0,4 / 3 bar)
- PMMA body and PVDF fittings
- Off-line probe holders for membrane probes (SCL3, SCL2, SCL8, SCL9, SCL10, SCL11, SBR, SCT) have got an anti-vacuum device

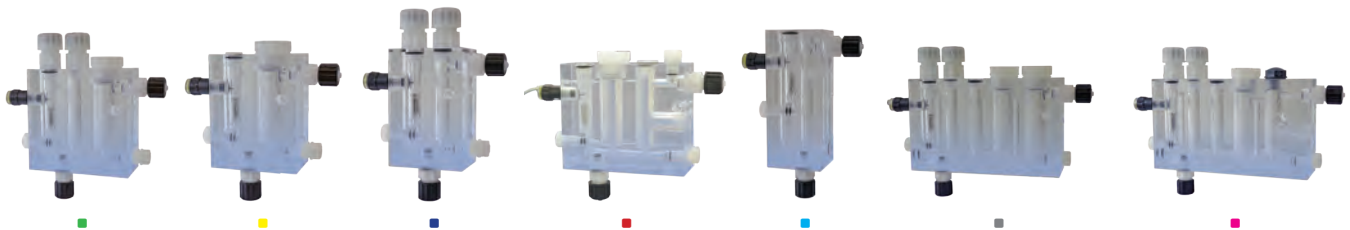

model	electrodes connection	fitting	temperature (°C)	pressure (bar)	hose
■ PEF1R	1 x scl; 2 x ø 12; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF1ER	1 x scl; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF1ER/K	1 x scl; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
■ PEF1R/K	1 x scl; 2 x ø 12; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
■ PEF2	2 x ø 12; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF2/K	2 x ø 12; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
■ PEF3	2 x ø 12 - pg13,5; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF5R	1 x scl; 2 x ø 12 - pg13,5; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF5R/K	1 x scl; 2 x ø 12 - pg13,5; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
■ PEF22R	2 x scl; 2 x ø 12; 1 x temp.	6x8 PVDF	50	5	4 m pe
■ PEF23R	1 x scl; 2 x ø 12; 1 x temp.; 1 x cd (3/4")	6x8 PVDF	50	5	4 m pe
■ PEF24R	1 x efl	6x8 PVDF	50	5	4 m pe
■ PEF26R	1 x scl; 1 x efl	6x8 PVDF	50	5	4 m pe
■ PEF27R	1 x scl; 1 x cd (3/4")	6x8 PVDF	50	5	4 m pe

PROXIMITY SENSOR

description

Inductive proximity sensor SEPR

LED STRIP

description

LED strip