


Slow mixers fitted with gear-box coupled to the shaft power. Shaft available in Aisi 304-316 or sheathed rubber. Impellers: Turbine type or special profile. These agitators are particularly suitable for mixing of solution with middle density-viscosity. Used on water treatment and chemical plants on medium-large tanks.

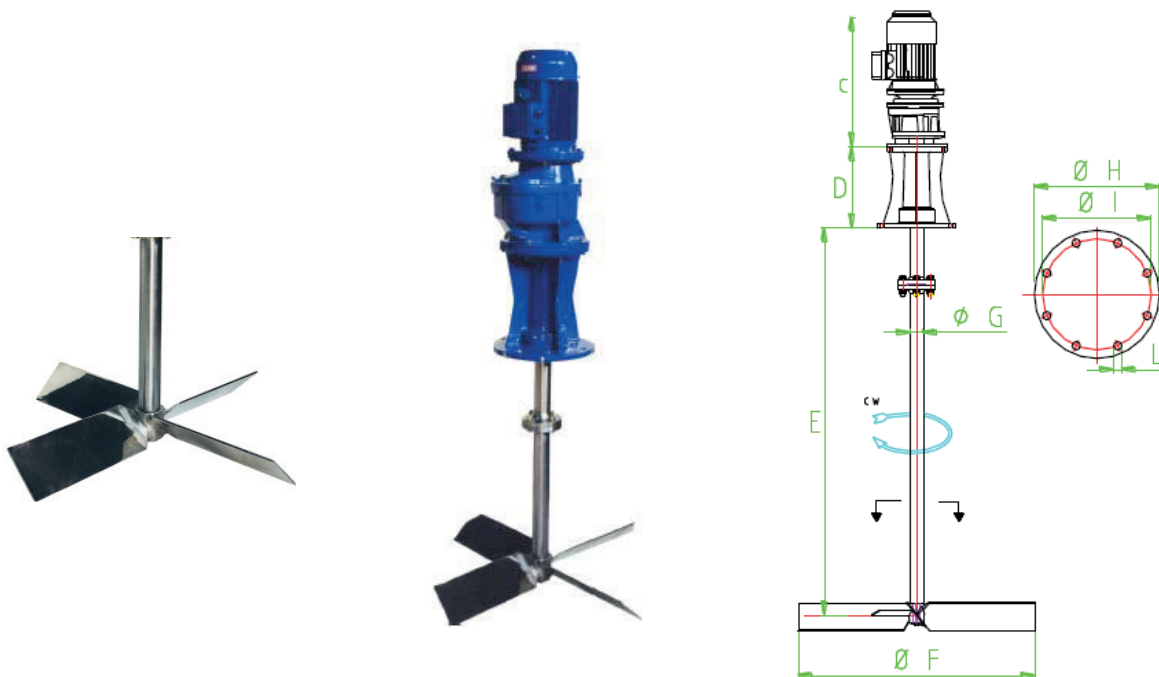

DIMENSIONS

TYPE	Kw	Rpm	C	D	E**	F	G	H	I	L	KG
RLV 037-4-210/80	0,37	210	340	120	800	300	25	160	130	4 X14	24
RLV 055-4-140/100	0,55	140	380	160	1000	400	30	210	170	4 X18	35
RLV 075-4-90/100	0,75	90	430	200	1500	500	35	265	225	8 X18	48
RLV 110-4-90/150	1,1	90	540	200	1500	550	35	265	225	8 X18	52
RLV 150-4-90/150	1,5	90	540	200	1500	600	35	265	225	8 X18	60
RLV 150-4-90/200	1,5	90	580	200	2000	650	40	265	225	8 X18	75
RLV 220-4-90/200	2,2	90	620	300	2000	750	45	320	280	8 X18	90
RLV 220-4-70/250	2,2	70	620	300	2500	800	50	320	280	8 X18	120
RLV 300-4-56/300	3,0	56	720	400	3000	1000	60	395	350	8 X22	190

SPECIAL FEATURES

S.S. 316 L
 Coated ABCITE
 Shaft joint

E Max Length for standard Series**