


Swift mixer with rigid coupling to 4-6-8 poles motors equipped with a stuffing box and radial bearing and gasket ring. Impeller "MARINE PROPELLER" inclination of 35°. These mixers are particularly suitable for mixing or dissolution of products with low viscosity in little-medium tank. Material Aisi 304-316 supplied with shaft and impeller.

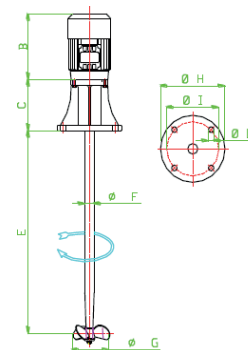

DIMENSIONS

TYPE	Kw	Rpm	B	C	E**	F	G	H	I	L	KG
SL 018-4/60	0,18	1400	180	120	600	25	100	160	130	4 X 14	15
SL 025-4/80	0,25	1400	200	120	800	25	110	160	130	4 X 14	16
SL 037-4/80	0,37	1400	200	120	800	25	120	160	130	4 X 14	18
SL 055-4/90	0,55	1400	240	165	900	30	140	210	170	4 X 18	22
SL 075-4/100	0,75	1400	240	165	1000	30	150	210	170	4 X 18	24
SL 110-4/120	1,1	1400	260	200	1250	35	160	265	225	8 X 18	28
SL 150-4/150	1,5	1400	280	200	1500	35	170	265	225	8 X 18	30

TYPE	Kw	Rpm	B	C	E**	F	G	H	I	L	KG
SL 018-6/60	0,18	900	200	120	600	25	110	160	130	4 X 14	15
SL 025-6/80	0,25	900	200	120	800	25	130	160	130	4 X 14	16
SL 037-6/80	0,37	900	240	165	800	30	140	210	170	4 X 18	22
SL 055-6/90	0,55	900	240	165	900	30	150	210	170	4 X 18	24
SL 075-6/100	0,75	900	260	165	1000	30	160	210	170	4 X 18	28
SL 110-6/125	1,1	900	280	200	1250	35	170	265	225	8 X 18	30
SL 150-6/150	1,5	900	300	200	1500	35	190	265	225	8 X 18	36

TYPE	Kw	Rpm	B	C	E**	F	G	H	I	L	KG
SL 025-8/80	0,25	700	240	165	800	30	160	210	170	4 X 18	22
SL 037-8/80	0,37	700	260	165	800	30	180	210	170	4 X 18	26
SL 055-8/100	0,55	700	280	165	1000	30	200	210	170	4 X 18	28
SL 075-8/100	0,75	700	280	200	1000	35	220	265	225	8 X 18	30
SL 110-8/120	1,1	700	280	200	1200	35	240	265	225	8 X 18	36
SL 150-8/150	1,5	700	300	300	1500	40	260	320	280	8 X 18	42

SPECIAL FEATURES

S.S. 316 L
 Coated (ABCITE pvc Dupont)
 Coated PP
 Single phase (Just 4 Poles)

E Max Legth for standard Series**