



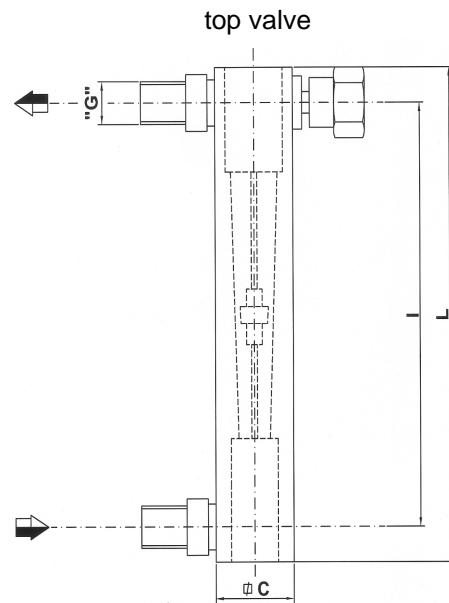

GENERAL FEATURES	
Employment:	Liquid or gas
Accuracy:	±5% del f.s.v.
Maximum pressure:	10 bar
Maximum temperature:	70°C
Connections material: AISI 304 or AISI 316	
Standard Inlet needle valve	

**ACCESSORIES**

- Inductive proxy PNP FP/1 for min or max alarm or FP/3
- Outlet needle valve

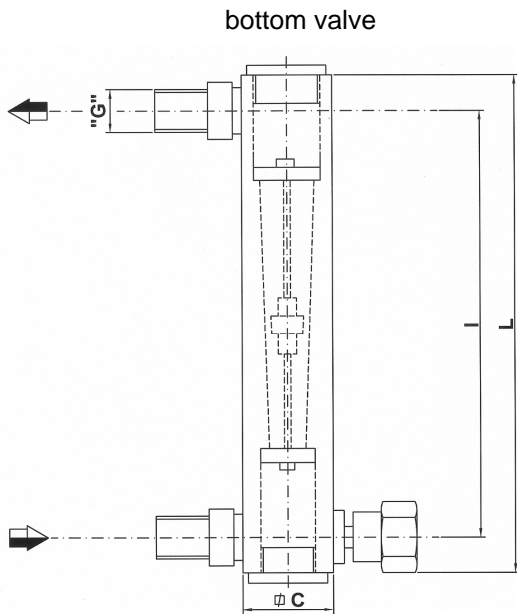

TIPO	standard ranges		threaded connections			
	WATER	AIR				
	Lt/h	Nmc/h	G	L	I	C
R-1/R	120	6	3/8" - 1/2"	160	115	40
	200					
	300	8				
	400					
	500	10				
R-2/R	600	15	3/8" - 1/2"	190	140	45
	800					
	1200	25				
	1500					
	2000					

TIPO	standard ranges		threaded connections			
	WATER	AIR				
	Lt/h	Nmc/h	G	L	I	C
PL-1/R	120	6	3/8" - 1/2"	215	170	40
	200					
	300	8				
	400					
	500	10				
PL-2/R	600	15	3/8" - 1/2"	255	205	45
	800					
	1200	25				
	1500					
	2000					