
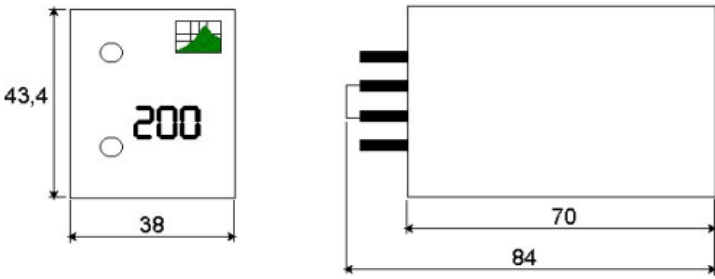
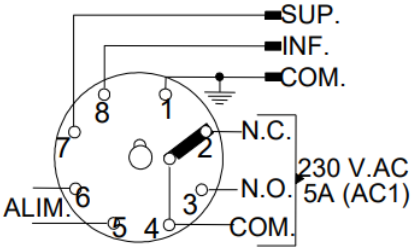


PICTURE	TECHNICAL DATA
	<p>Electric wiring: plug-in type; octal socket</p> <p>Protection class: IP40</p> <p>Internal components: surface mounting technology (SMD)</p> <p>Front led lamps: green: power supply red: switch status</p> <p>Sensitivity: standard 10μS - 10.000μS on request 1μS - 20μS</p> <p>Electrolysis phenomena: not present in a.c. models</p> <p>Contact: N.O. 5 A / 230Vac</p> <p>Power supply: 24 or 110 or 230Vac</p> <p>Frequency: 50/60 Hz</p> <p>Absorption: 5 VA (ac models)</p> <p>Weight: 220 g</p>

MECHANICAL DIMENSIONS	WIRING
	

TYPICAL APPLICATIONS

- boilers
- tanks, wells
- heating plants
- pumping system
- protection of pumps, disabling running without water

ORDER CODES

Models	Resistivity	Sensitivity	Characteristic	Power Supply
200-000-01	0 \div 100 k Ω	10 \div 10.000 μ S	standard sensitivity	24Vac
200-000-02	0 \div 100 k Ω	10 \div 10.000 μ S	standard sensitivity	110Vac
200-000-03	0 \div 100 k Ω	10 \div 10.000 μ S	standard sensitivity	230Vac
200-000-04	0 \div 100 k Ω	10 \div 10.000 μ S	standard sensitivity	24Vdc
200-002-03	50 k Ω \div 1 M Ω	15 \div 20 μ S	high sensitivity	230Vac