

### MULTI POINT LEVEL INDICATOR IN AISI 316

#### USE:

Made to detect, with maximum safety, the level of liquids in tanks containing corrosive substances. Entirely in AISI 316 stainless steel, they are suitable for use in the chemical, pharmaceutical and food industries.

#### OPERATION:


When the float of the indicator encounters the Reed switch at the pre-established point, the contact activated by the magnet housed in the float opens or closes, thus obtaining the possibility of sending a luminous or acoustic signal or activating or disconnecting any electrical equipment connected to it.

#### FITTING:


The indicator must be fitted in the vertical position, and the float must be at least 35mm from ferrous surfaces (walls, tanks, etc.).

**Max Pressure: 10 Bar**

AISI 316 PROCESS CONNECTION

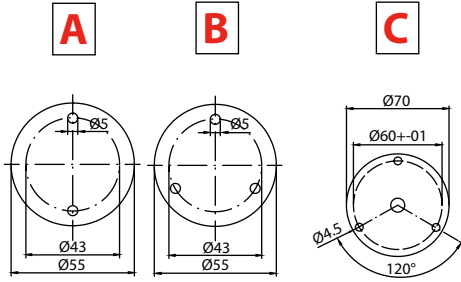


FLOATS

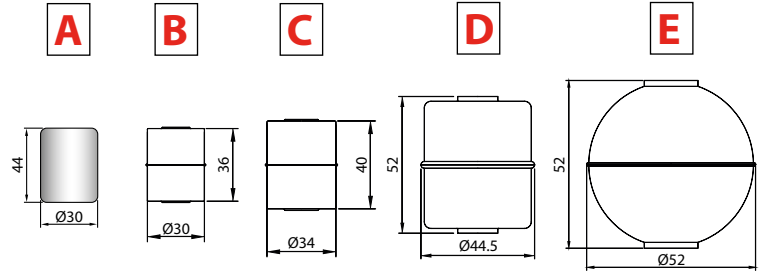

ELECTRICAL CONNECTIONS

- 1 IP68 ALUMINIUM HEAD
- 2 IP65 ALUMINIUM HEAD
- 5 IP68 S/STEEL AISI 316 HEAD

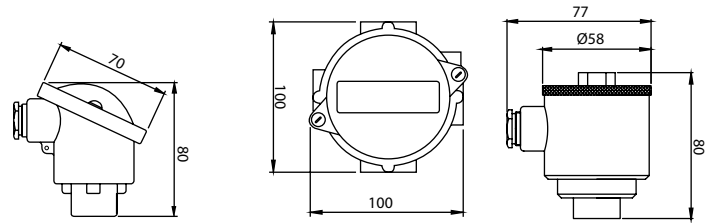

| THERMOSTAT ELECTRICAL CHARACTERISTICS |   |
|---------------------------------------|---|
| VOLTAGE                               | 250 V. COMMUTABLE   |
| FREQUENCY                             | 50 Hz   |
| LOAD VALUES                           | 4,0 A. $\cos \varphi = 0,6$ (I M OT)<br>6,3 A. $\cos \varphi = 1,0$ (I N) |
| MAX. LOAD                             | 10 A. $\cos \varphi = 1$  |
| COMMUTATING TEMPERATURE               | 50°C - 60°C - 70°C - 80°C   |
| CONTACTS                              | N.CH. = NORMALLY CLOSED<br>N.A. = NORMALLY OPEN                           |
| TOLERANCES                            | ± 5°C   |

| ELECTRICAL CONTACTS | FLOAT     | ELECTRICAL CHARACTERISTICS |                          |                          |                    |
|---------------------|-----------|----------------------------|--------------------------|--------------------------|--------------------|
|                     |           | POWER COMMUTABLE IN D.C.   | POWER COMMUTABLE IN A.C. | CURRENT STRENGTH IN A.C. | COMMUTABLE VOLTAGE |
| SPST                | A - B - D | 60 W                       | 60 V.A.                  | 3 A                      | 230 VDC / VAC      |
| SPDT                |           | 30 W                       |                          | 0,5 A                    | 500 VDC            |
| SPST                | C - E - F | 80 W                       | 80 V.A.                  | 1,3 A                    | 250 VDC / VAC      |
| SPDT                |           | 60 W                       | 60 V.A.                  | 1 A                      | 230 VDC / VAC      |

| MOD.        | "A"              | PROCESS CONNECTION                                  | ELECTRICAL CONNECTION          | FLOAT   | TEMPERATURE CONTROL     | OPERATING TEMPERATURE | N° POINTS OF CONTROL | ELECTRICAL CONNECTION   |          | QUOTE AND NATURE OF CONTACTS IN THE PRESENCE OF LIQUID |             |             |             |             |             |             |             |             |             |             |             |        |
|-------------|------------------|---|--------------------------------|---|-------------------------|-----------------------|----------------------|-------------------------|----------|--|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------|
|             |                  |   |                                |   |                         |                       |                      | SPST                    | SPDT     | B  | C           | D           | E           | F           | G           | H           | I           | L           |             |             |             |        |
|             |                  |   |                                |   |                         |                       |                      |                         |          |  |             |             |             |             |             |             |             |             | SPST        | SPDT        |             |        |
| IEG-INOX-MP | FROM 170 TO 3500 | A Ø55 - 2 HOLE                                      | 1 6 POLE IP68                  | A Ø30 x 44 BLACK NBR (DISTANCE BETWEEN POINTS 70 mm)      | 1 WITHOUT               | S -20...+80°C         | 3                    | 1 COMMON                | 4        | 7  | QUOTE+      | QUOTE+      | QUOTE+      | QUOTE+      | QUOTE+      | QUOTE+      | QUOTE+      | QUOTE+      | QUOTE+      | QUOTE+      |             |        |
|             |                  | B Ø55 - 3 HOLE                                      |                                | B Ø30 x 36 INOX (DISTANCE BETWEEN POINTS 70 mm)           | 2 PT 100                |                       |                      | SEPARATE                | 6        | 9  |             |             |             |             |             |             |             |             |             |             |             |        |
|             |                  | C Ø70 - 3 HOLE                                      | 2 10 POLE IP65                 | B Ø30 x 36 INOX (DISTANCE BETWEEN POINTS 50 mm)           | 3 PT 1000               | H -20...+120°C        | 4                    | 1 COMMON                | 5        | 9  | C SPST N.C. | C SPST N.C. | C SPST N.C. | C SPST N.C. | C SPST N.C. | C SPST N.C. | C SPST N.C. | C SPST N.C. | C SPST N.C. | C SPST N.C. | C SPST N.C. |        |
|             |                  | D 1" GAS  |                                | C Ø34 x 40 INOX (DISTANCE BETWEEN POINTS 60 mm)           | 4 THERMOSTAT 50°C - NO  |                       |                      | SEPARATE                | 8        | /  |             |             |             |             |             |             |             |             |             |             |             |        |
|             |                  | E 1 1/2" GAS  | 5 6 POLE IP68 AISI 316 S/STEEL | D Ø44.5 x 52 INOX (DISTANCE BETWEEN POINTS 60 mm)         | 5 THERMOSTAT 60°C - NO  | K -20...+150°C        | 5                    | 1 COMMON                | 6        | /  | O SPST N.O. | O SPST N.O. | O SPST N.O. | O SPST N.O. | O SPST N.O. | O SPST N.O. | O SPST N.O. | O SPST N.O. | O SPST N.O. | O SPST N.O. | O SPST N.O. |        |
|             |                  | F 2" GAS  |                                | E Ø34 x 40 INOX (DISTANCE BETWEEN POINTS 75 mm)           | 6 THERMOSTAT 70°C - NO  |                       |                      | SEPARATE                | 10       | /  |             |             |             |             |             |             |             |             |             |             |             |        |
|             |                  | G CLAMP 2" 1/2 (1-2-5 ELECTRIC CONNECTION REQUIRED) | L... L CABLE                   | D Ø44.5 x 52 INOX (DISTANCE BETWEEN POINTS 75 mm)         | 7 THERMOSTAT 80°C - NO  | K -20...+150°C        | 6                    | 1 COMMON                | 7        | /  | S SPST      | S SPDT      | S SPDT      | S SPDT      | S SPDT      | S SPDT      | S SPDT      | S SPDT      | S SPDT      | S SPDT      | S SPDT      | S SPDT |
|             |                  |   |                                | E Ø52 x 52 INOX SPHERICAL (DISTANCE BETWEEN POINTS 75 mm) | 8 THERMOSTAT 50°C - NC  |                       |                      | SEPARATE                | /        | /  |             |             |             |             |             |             |             |             |             |             |             |        |
|             |                  |   |                                | 9 THERMOSTAT 60°C - NC                                    | 10 THERMOSTAT 70°C - NC |                       |                      | 11 THERMOSTAT 80°C - NC | 1 COMMON | 8  |             |             |             |             |             |             |             |             |             |             |             |        |
|             |                  | IEG-INOX-MP 2000                                    | E                              | 2   | C                       | 1                     | H                    | 5                       | S        | 1960-C   | 1800-C      | 1400-O      | 1000-O      | 200-O       | -           | -           | -           | -           | -           | -           | -           | -      |