



IEG-TC1 1/2"  
IEG-TC2 1/2"

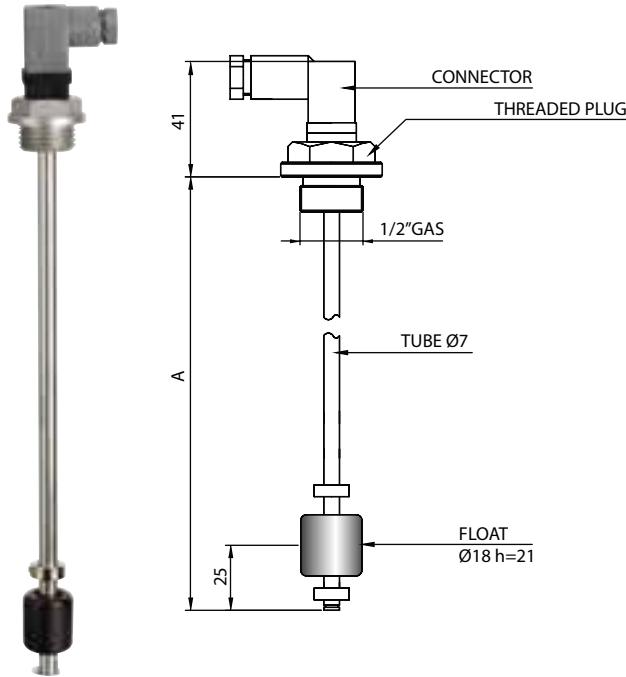

IEG-TCMM 1/2"

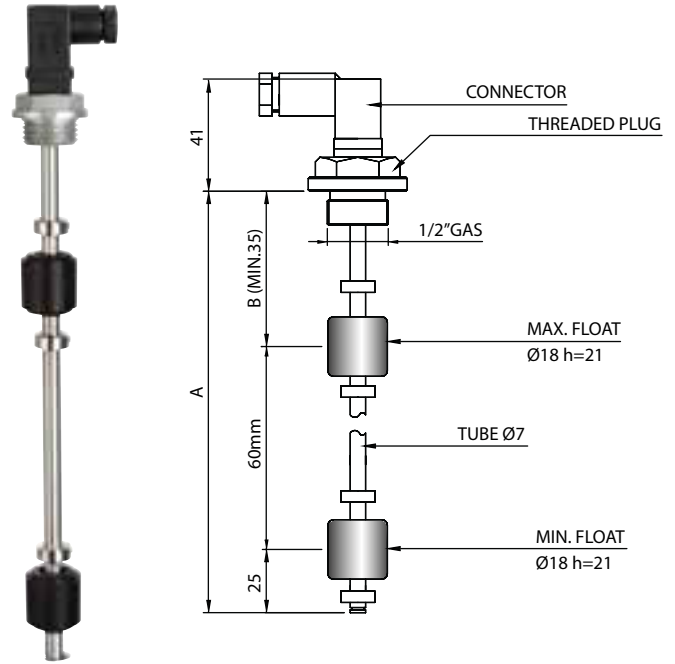

**ELECTROMAGNETIC LEVEL INDICATORS WITH ONE OR TWO CONTACTS AND 1/2" GAS CONNECTION**

**USE:**

Made to ensure, with maximum safety, the minimum or minimum and maximum levels of liquids in tanks, and hydraulic power packs containing mineral oils with viscosity not higher than 220 cSt. and for all non-corrosive and inflammable liquids.


**OPERATION:**

When the float of the indicator encounters the Reed switch incorporated in the tube at the pre-established distances, the contact activated by the magnet housed in the float opens or closes, thus obtaining the possibility of sending a luminous or acoustic signal or disconnecting any electrical equipment connected to it.

**FITTING:**

The indicator must be fitted in the vertical position, and the float must be at least 35mm from ferrous surfaces (walls, tanks, etc.). The tight's flange is ensured by a flat synthetic rubber gasket.

Connector CE  
EN 175301-803-A  
IP65 PG.9/11



MODEL	PIPE MATERIAL	CONNECTION	ELECTRICAL CONTACTS	ELECTRICAL CHARACTERISTICS					TEMPERATURE		MAX. PRESSURE
				POWER COMMUTABLE IN D.C.	POWER COMMUTABLE IN A.C.	CURRENT STRENGTH IN A.C.	COMMUTABLE VOLTAGE	PROTECTION	RANGE	TEFLON WIRES	
IEG - TC 1/2	INOX	1/2" GAS MALE ALUMINUM		40 W	40 V.A.	2 A	230 VDC 230 VAC	IP 65	-20 +80 °C	-20 +120 °C	10 Bar
IEG - TCMM 1/2			SPST								
IEG - TC2 - 1/2				20 W	20 V.A.	1 A	150 VDC 150 VAC				