





VERSION	PROCESS CONNECTION													
Code: RL8 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	THREADED	SANITARY FITTING												
<p>PC polycarbonate loaded <input type="checkbox"/> B</p> <p>DIN A Aluminium varnished <input type="checkbox"/> G</p>  <p>Special <input type="checkbox"/> Z</p>	 <p><input type="checkbox"/> 2 G 1" AISI316</p> <p><input type="checkbox"/> 4 1" NPT AISI316</p> <p><input type="checkbox"/> 5 G 1" PVC</p> <p>3 ropes max.</p>	<p>CLAMP "3A" CONFORM</p> <p><input type="checkbox"/> 7 1 DN25 (1") AISI316L</p> <p><input type="checkbox"/> 7 3 DN38 (1 1/2") AISI316L</p> <p><input type="checkbox"/> 7 5 DN51 (2") AISI316L</p> <table border="1"> <thead> <tr> <th>DN</th> <th>A</th> <th>E</th> </tr> </thead> <tbody> <tr> <td>25 (1")</td> <td>50.5</td> <td>49</td> </tr> <tr> <td>38 (1 1/2")</td> <td>50.5</td> <td>49</td> </tr> <tr> <td>51 (2")</td> <td>64</td> <td>49</td> </tr> </tbody> </table> <p><input type="checkbox"/> 9 9 Special</p>	DN	A	E	25 (1")	50.5	49	38 (1 1/2")	50.5	49	51 (2")	64	49
DN	A	E												
25 (1")	50.5	49												
38 (1 1/2")	50.5	49												
51 (2")	64	49												
<p>ELECTRODE NUMBER</p> <p>Code: RL8 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/></p> <p><input type="checkbox"/> B 1</p> <p><input type="checkbox"/> C 2</p> <p><input type="checkbox"/> D 3</p> <p><input type="checkbox"/> E 4, 1" threaded excluded</p> <p><input type="checkbox"/> H 5, 1" threaded excluded</p> <p><input type="checkbox"/> Z Special</p>	 <p><input type="checkbox"/> 1 2 G 1 1/2" AISI316</p> <p><input type="checkbox"/> 1 8 G 1 1/2" PVC</p> <p><input type="checkbox"/> 1 9 G 1 1/2" PTFE</p>													
<p>ROPE Ø AND INSULATION TYPE</p> <p>Code: RL8 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/></p> <p><input type="checkbox"/> 8 1 Ø1 AISI316 PVC insulated</p> <p><input type="checkbox"/> 9 9 Special</p>														

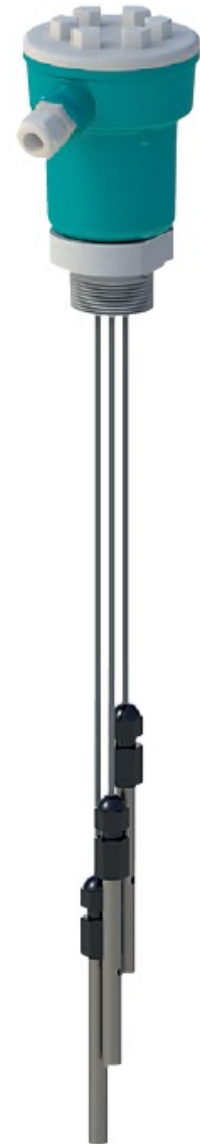

RL8 Multi ropes electrode
Conductive level control; max. 5 ropes
Max electrodes length 30m

Housing	
B	Polycarbonate loaded; IP66
Z	Special

Process connection	
02	G 1" / SS316
04	1" NPT-M / SS316
05	G 1" / PVC
12	G 1" 1/2 / SS316
18	G 1" 1/2 / PVC
19	G 1" 1/2 / PTFE
71	Clamp 1" / SS316
73	Clamp 1" 1/2 / SS316
75	Camp 2" / SS316
99	Special

Nr. of electrodes	
B	n.1
C	n.2
D	n.3
E	n.4; only for connection cod. 12, 18, 73, 75
H	n.5; only for connection cod. 12, 18, 73, 75
Z	Special

Rope type, price per meter of each electrode	
81	PVC insulated Ø1,5mm SS316
99	Special