




The compact rugged OG5 oval gear flowmeter is designed to give high performance with a low cost of ownership. It has a standard flow range from 0.5 to 100 L/min on 30 cSt oil and 4 to 100 L/min on water-like liquids. It can have totally non-metallic wetted components, PEEK, PTFE encapsulated magnets and elastomer seals, which makes this the ideal choice for the metering of aggressive chemicals. The standard inlet and outlet are 1" female threads. For OEMs, alternatives are available, including manifold mountings. The standard model is 316 St St with Viton™ 'O' ring seal.

At the heart of the meter are a pair of toothed oval gears one of which contains chemically resistant magnets. Rotation is detected through the chamber wall by a Hall Effect detector or a reed switch giving approximately 78 pulses per litre passed. The output is an NPN pulse or a voltage free contact closure either of which is readily interfaced with most electronic display or recording devices. This combination of materials and technology ensures a long life product with reliable, accurate operation throughout.

Oval Gear Pressure Drop Information

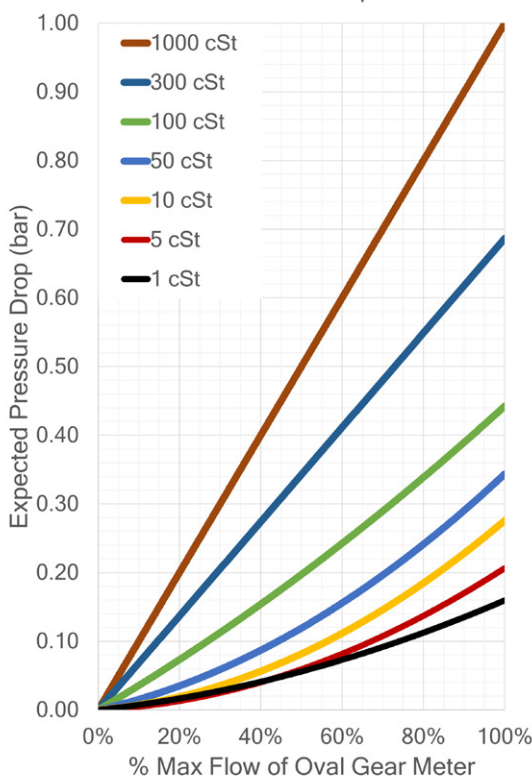

## FEATURES

- Excellent chemical resistance
- Rugged construction
- Individual calibration
- High viscosity options
- Low pressure drop
- No flow conditioning required
- Compact meter assembly
- Hall, reed switch or Namur sensor
- Accuracy 0.75% reading water  
0.5% reading oil (30 cSt)
- 0.1% repeatability
- IP65/NEMA 4 protection
- Models to 700 bar (see High Pressure Data Sheet)



## IDEAL FOR

- Engine test
- Oil flow
- High viscosity liquids
- OEM equipment
- Hazardous areas
- Batching



## Ordering Codes

### Model

OG5

### Body Material

S = 316 St St 50 bar std

A = Aluminium 10 bar max

P = PEEK 10 bar max (at 80°C max)

### Temp Rating

S = 80°C / 158°F

T = 100°C / 212°F

U = 150°C / 300°F

### Pressure Rating

5 = 50 bar 750 PSI (St St)

1 = 10 bar 150 PSI (Al / PEEK)

4 = 400 bar 5880 PSI (St St)

7 = 700 bar 10150 PSI (St St)

### Seal Material

V = Viton™

N = Nitrile

E = EPDM

P = PTFE (50 bar max)

K = Kalrez®

### Detector Type

H = Hall effect

R = Reed Switch & Resistor

N = Namur

X = Reed Switch (hazardous area)

### Process Fitting Size

U = 1" (OG5 std)

### Process Fitting Type

B = BSP F

N = NPT F

e.g. **OG5-SS5-VHU-B** is a stainless steel meter rated at 80°C, 50 bar, Viton™ seal, Hall effect detector and a 1" BSP thread.




## TECHNICAL SPECIFICATIONS

Sample product codes	Stainless standard OG5-SS5-VHU-B	Aluminium standard OG5-AS1-VHU-B	PEEK standard OG5-PS1-VHU-B
Flow range - Water - 30 cSt Oil	4.0 - 100 L/min 0.5 - 100 L/min	4.0 - 100 L/min 0.5 - 100 L/min	4.0 - 100 L/min 0.5 - 100 L/min
Wetted Materials - Body - Gears - Seal - Magnet - Spindles	316 St St Carbon filled PEEK Viton™ PTFE St St	Aluminium Carbon filled PEEK Viton™ PTFE St St	PEEK* Carbon filled PEEK Viton™ PTFE St St
Accuracy - Water - 30 cSt oil	± 0.75% Reading ± 0.5% Reading	± 0.75% Reading ± 0.5% Reading	± 0.75% FSD ± 0.75% FSD
Repeatability	± 0.1%	± 0.1%	± 0.1%
Detector Type	Hall effect	Hall effect	Hall effect
Terminations	M20	M20	M12 Connector
Approx 'K' factor (Pulses/Litre)	78	78	78
Viscosity Range^	1-1000 cSt	1-1000 cSt	1-1000 cSt

\* Hastelloy C spindles

^ High viscosity (above 1000 cSt) options available

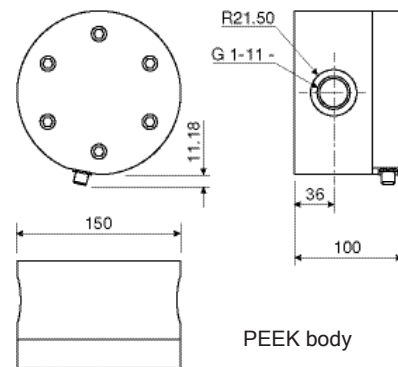

### Weight (kg)

St St	50 bar	5.000
PEEK	10 bar	2.250
Aluminium	10 bar	2.250
St St	400 bar	9.400