


The TMT701 Inert gas filled Industrial Thermometer is used in general industrial applications with extreme media temperatures from -200°C up to +700°C.

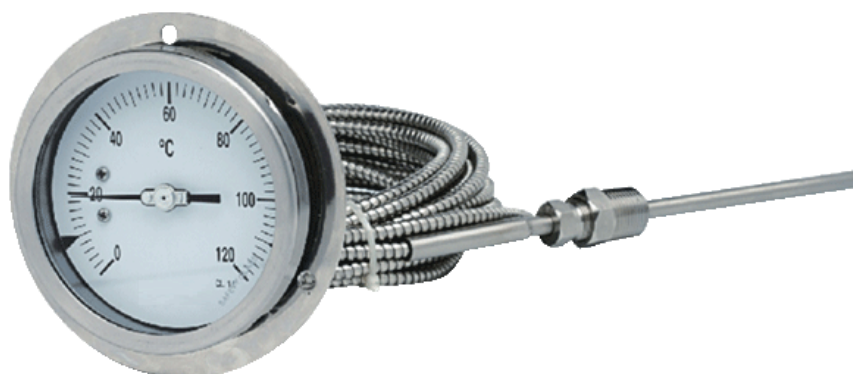

Applications

- Liquid & gaseous mediums
- Corrosive environments
- Oil & Gas applications
- Chemical & Petrochemical

Features

- Inert gas filled expansion
- Filled versions
- Bi-metal compensation

Reference

- EN 13190
- ATEX 2014/34/UE

Standard parameters	
Accuracy	CL 1.0 (Class 1)
Permissible ambient temperature	-40 ... +60°C with/without dampening
Storage & Transport temperature	-50 ... +70°C without liquid dampening -20 ... +60°C with liquid dampening
Over range limits	110% full scale
Stem pressure rating	25 bar (Without thermowell)
Weld joints	TIG argon arc welding
Measuring range	-200 ... 0 to 0 ... 700°C -330 ... 0 to 0 ... 1290°F

07/2020

Data sheet H20019c

Ordering code

TMT701 - XX - XXX - XX - XXX - XX - XXXX - XX - XX - XX - XX - XX - XXXXX - XX													
1. Dial size	100 mm / 4"	04											
	125 mm / 4½"	05											
	150 mm / 6"	06											
	250 mm / 10"	10											
2. Range ¹	Refer "Range Table" ²		XXX										
3. Mounting pattern	Direct, Bottom connection	B0	Every Angle mounting, Centre Back connection	R1									
	Wall/Surface/Projection mounting, Bottom connection	B1	Lower, Back connection	L0									
	2" Pipe/Yoke mounting, Bottom connection	B2	Panel/Front flange mounting, Lower Back connection	L1									
	Every Angle mounting, Direct Back connection	B9	Panel/bracket mounting, Lower Back connection	L2									
	Centre Back connection	R0											
4. Stem diameter	6,0 mm	M60	¼" (6,35 mm)	I14									
	8,0 mm	M80	9,5 mm	M95									
	10 mm	M10	12 mm	M12									
5. Ingress protection	IP 65	ER	IP 67	ET									
	IP 66	ES											
6. Stem length	Up to 1,500 mm			XXXX									
7. Process connection type	Fixed connection		KX	Swivel / Revolving connection		BW							
	Adjustable connection		KW	Without		99							
8. Process connection ¹	½" NPT (M)	14N	½" NPT (F)	04N	3/8" BSP (M) ⁶	13B	Special ¹	ZZZ					
	¼" NPT (M) ⁵	12N	M27 X 2.0 mm (M)	16M	¾" BSP (M)	15B							
	M20 X 1.5 mm (M)	14M	½" BSP (M)	14B	¾" NPT (F)	05N							
	¾" NPT (M)	15N	¼" BSP (M) ⁵	12B	Without	099							
9. Assembly	Direct (Stem type)		B8	Remote (Capillary type) ⁴					B9				
10. Capillary	AISI 304SS		OU	AISI 316 SS					OV				
11. Armour	AISI 304 SS			OX	PVC (Ambient max. 60°C)					OZ			
	AISI 316 SS			OY									
12. Remote mounting length	250 mm up to 25,000 mm			XXXXX									
13. Other options	Case & Ring in AISI 316 SS (B0) ³		BA	Case & Ring in AISI 316 SS (B9) ³		HV	Material test certificate 2.2		TM				
	Case & Ring in AISI 316 SS (B1) ³		BB	Helium gas filled system		E9	SS tag plate, AISI 304 SS		XF				
	Case & Ring in AISI 316 SS (B2) ³		BC	Shatterproof safety glass		GC	SS tag plate, AISI 316 SS		XG				
	Case & Ring in AISI 316 SS (R0) ³		BG	Dampened movement		GM	Dial tag marking		XT				
	Case & Ring in AISI 316 SS (R1) ³		BH	Maximum Reading pointer		GW	Custom designed dial		XR				
	Case & Ring in AISI 316 SS (L0) ³		BK	Dampening liquid, silicon oil		OA	Dampening liquid, glycerin (65°C)		EG				
	Case & Ring in AISI 316 SS (L1) ³		BL	Rubber parts, Viton		RA	ATEX Version ⁷		AX				
	Case & Ring in AISI 316 SS (L2) ³		BM	5 - point calibration certificate		TA							


¹ For other ranges, connections, please contact factory.² Equivalent scales available in °F, °C/°F, °F/°C.³ Option "Case & Ring in AISI 316 SS" is applicable for DN100 & DN150 only.⁴ While selecting capillary, Bottom connections are supplied with wall mounting flange & Back connection are with Panel / front flange.⁵ 1/4" connections are available up to 1/4" (6.35 mm) stem diameter only.⁶ 3/8" connections are available up to 10 mm stem diameter only.⁷  II 2 G Ex h IIC T6+T1 Gb X

II 2 D Ex h IIIC T85°C+T450°C Db

Specifications		
Material of construction	Sensing element	Inert Gas Filled sensor bulb
	Case & Ring material	AISI 304 SS
	Stem & Process connection material	AISI 316 SS
	Dial	Aluminum, black graduation on white background
	Pointer	Micrometer zero adjustable, aluminum, black powder coated
	Gaskets	NBR
	Window	Sheet glass
Standard specifications	Dial size	DN100 / DN125 / DN150/DN250
	Range	-200 ... 0 to 0 ... +700°C / -330 ... 0 to 0 ... +1290°F
	Mounting pattern	Direct Bottom connection
	Stem size	6,0 mm
	Ingress protection	IP 65
	Stem length	70 mm to 2,000 mm*
	Assembly	Direct
	Process connection type	Adjustable connection
	Process connection	1/2" NPT (M) / 1/2" BSP (M)
Standard specifications : dampening liquid filled, glycerin	Gaskets & Filling plugs	NBR
	Dampening liquid	Glycerin 99.7% (-20°C to 65°C) [Up to range 100°C]
	Window	Shatterproof safety glass
Standard specifications : dampening liquid filled, silicon	Gaskets & Filling plugs	NBR
	Dampening liquids	Silicon oil [Up to range 200°C]
	Window	Shatterproof safety glass
* Depending on range & stem diameter		

Dimensions - All dimensions are in mm

Mounting pattern: B0

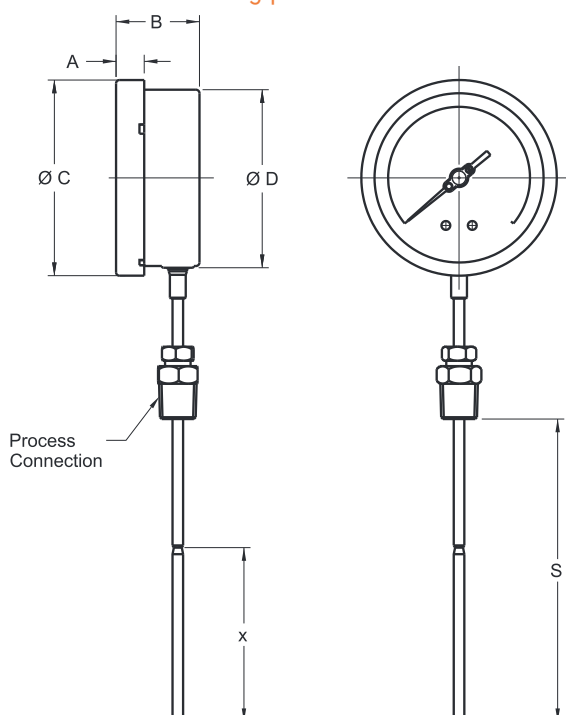


DN	A	B	ØC	ØD	S	X
100	12	48	111	100	*	**
125	15	48	129	118,5	*	**
150	15	48	161	149	*	**
250	18,5	50	263	250	*	**

* As per customer requirement.

** Refer Stem length chart table.


Mounting pattern: B1

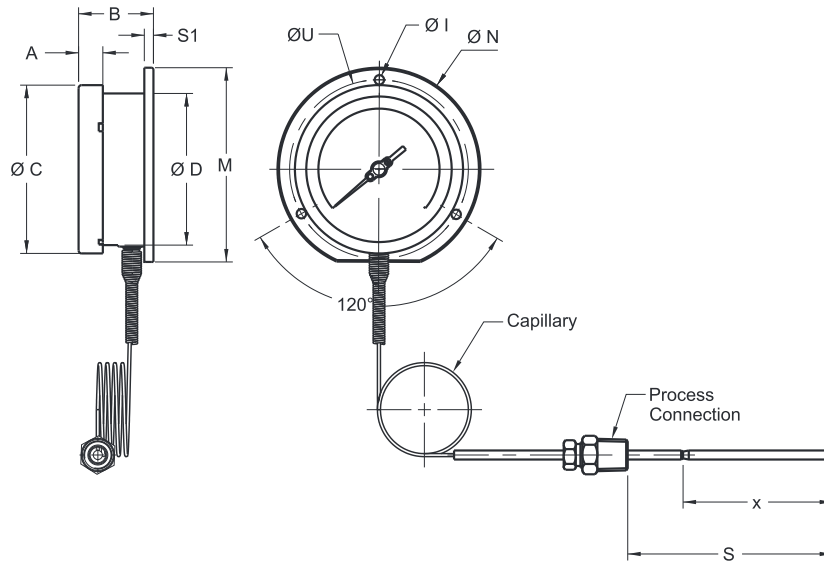

DN	A	B	ØC	ØD	ØI	ØN	M	S1	ØU	S	X
100	12	52	111	100	6	134	128	6	118	*	**
125	15	50	129	118.5	6	150	143,5	4	137	*	**
150	15	52	161	149	6	186	172,4	6	168	*	**
250	18.5	51.5	263	250	7	290	286.5	1,5	276	*	**

* As per customer requirement.
** Refer Stem length chart table.


Mounting pattern: B2

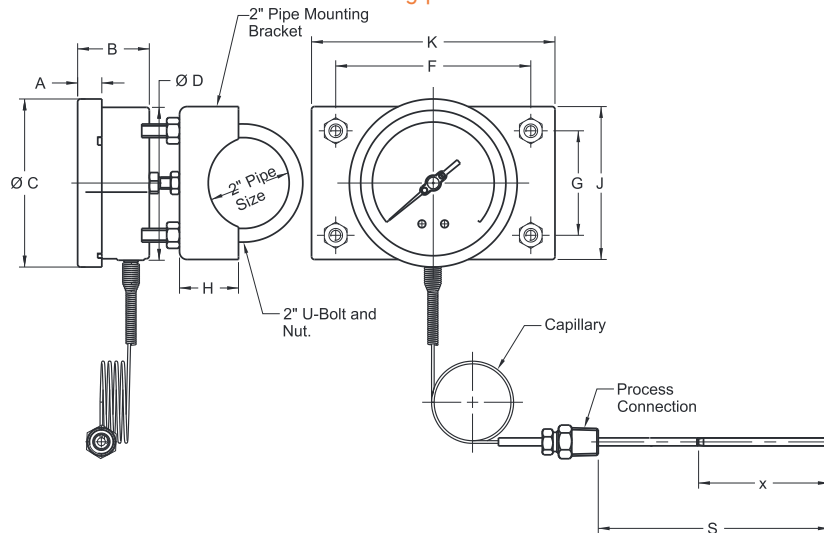

DN	A	B	ØC	ØD	S	X	F	G	H	J	K
100	12	48	111	100	*	**	129	69	39	101	161
125	15	48	129	118.5	*	**	129	69	39	101	161
150	15	48	161	149	*	**	129	69	39	101	161
250	18.5	50	263	250	*	**	129	69	39	101	161

* As per customer requirement.
** Refer Stem length chart table.


Mounting pattern: B9

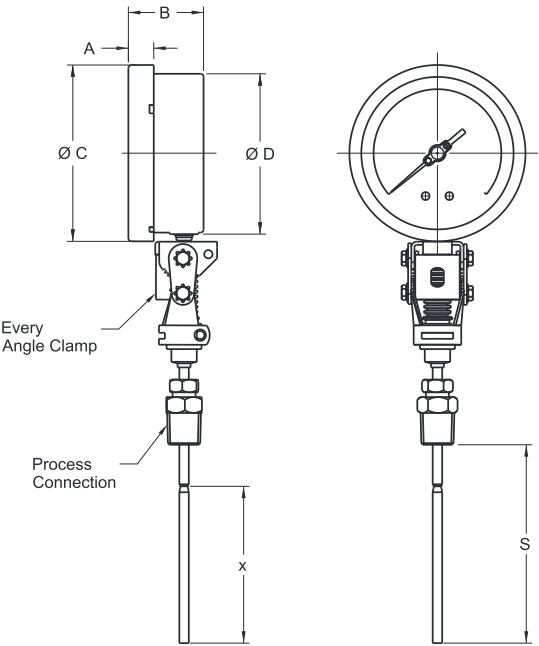

DN	A	B	ØC	ØD	S	X
100	12	48	111	100	*	**
125	15	48	129	118,5	*	**
150	15	48	161	149	*	**
250	18,5	50	263	250	*	**

* As per customer requirement.
** Refer Stem length chart table.


Mounting pattern: L2

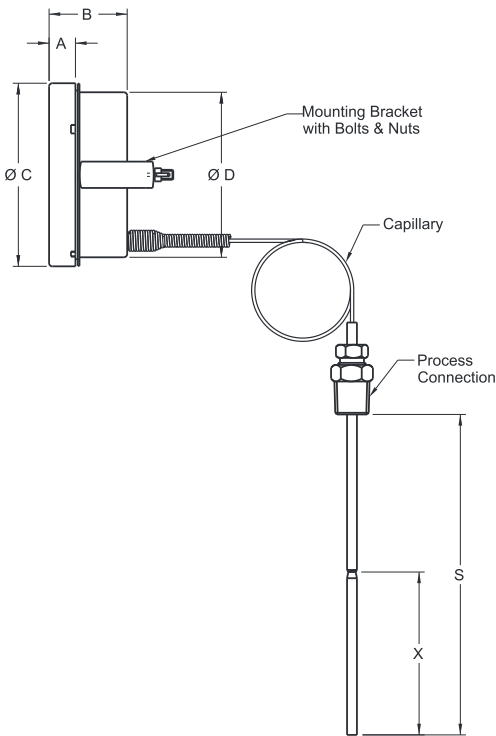

DN	A	B	ØC	ØD	J	K	V	S	X
100	12	48	111	100	72	16	108	*	**
125	15	48	129	118.5	75	15	125	*	**
150	15	48	161	149	106,5	16	158,5	*	**
250	18.5	50	263	250	180	30	270	*	**

* As per customer requirement.
** Refer Stem length chart table.


Mounting pattern: R0

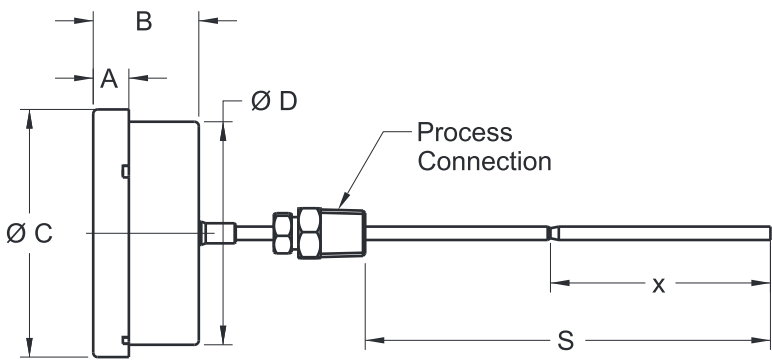

DN	A	B	ØC	ØD	S	X
100	12	48	111	100	*	**
125	15	48	129	118,5	*	**
150	15	48	161	149	*	**
250	18,5	50	263	250	*	**

* As per customer requirement.
** Refer Stem length chart table.


Mounting pattern: R1

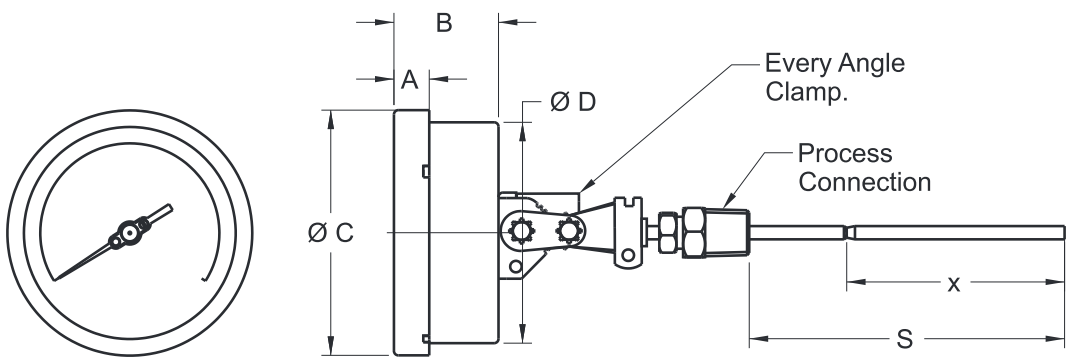

DN	A	B	ØC	ØD	S	X
100	12	48	111	100	*	**
125	15	48	129	118,5	*	**
150	15	48	161	149	*	**
250	18,5	50	263	250	*	**


* As per customer requirement.
** Refer Stem length chart table.

Mounting pattern: L0

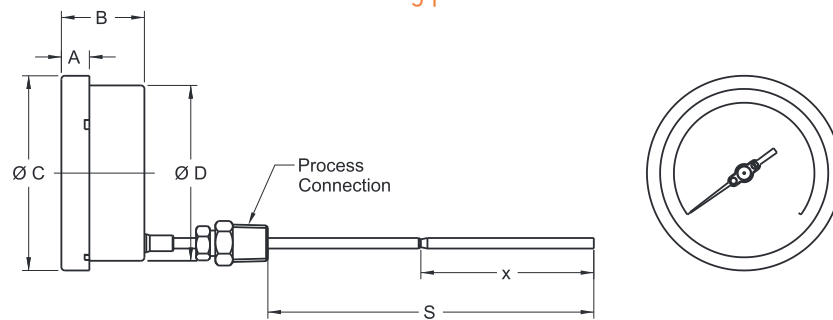

DN	A	B	ØC	ØD	S	X
100	12	48	111	100	*	**
125	15	48	129	118,5	*	**
150	15	48	161	149	*	**
250	18,5	50	263	250	*	**

Mounting pattern: L1

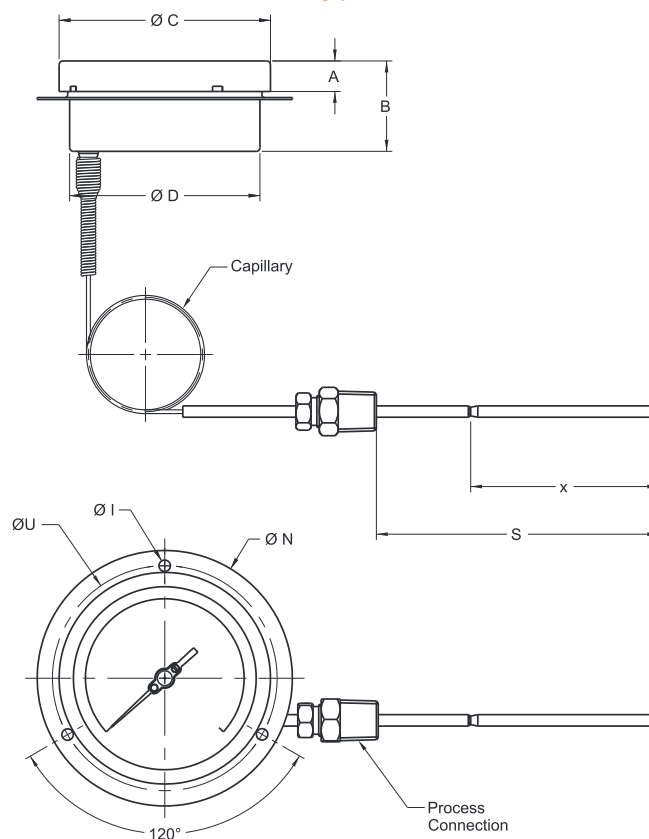

DN	A	B	ØC	ØD	ØI	ØN	ØU	S	X
100	12	48	111	100	6	134	118	*	**
125	15	48	129	118.5	6	150	137	*	**
150	15	48	161	149	6	186	168	*	**
250	18.5	50	263	250	7	290	276	*	**

* As per customer requirement.

** Refer Stem length chart table.


Stem length chart

Stem/Sensor Size (mm)	(x) Sensor Length (mm)	(S) Minimum stem Length (mm)
Rigid stem type Inert Gas Thermometer		
Capillary type Inert Gas Thermometer (≤ 10 m)		
6 / 1/4"	200	240
8/9,5	120	160
10	90	130
12/14	70	110
Capillary type Inert Gas Thermometer (> 10 m up to 25 m)		
8/9,5	170	210
10	140	180
12/14	90	130

- All length mentioned above are to be considered below thread only.
- For other reduced length, contact factory before ordering.

¹⁾ For other connections, please contact factory.

²⁾ Equivalent scales available in °F, °C/°F, °F/°C. Please contact factory for details.

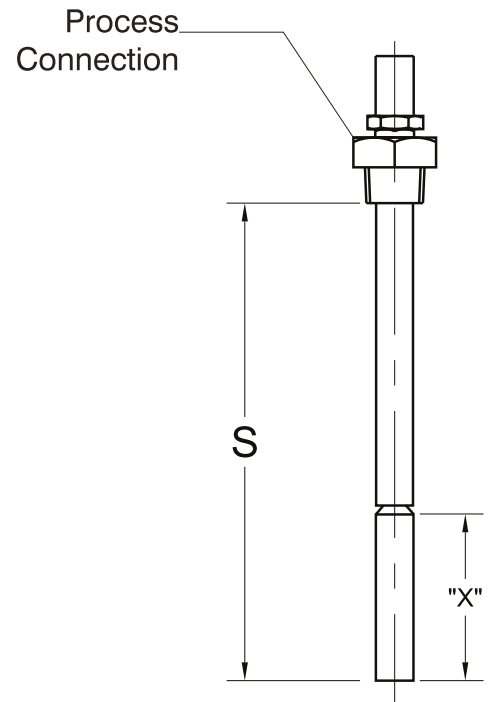

Range table (°C)	Code
-20 ... +40	C01
-20 ... +60	C02
-20 ... +80	C03
-20 ... +100	C04
-20 ... +120	C05
-20 ... +180	C06
-30 ... +50	C07
-30 ... +70	C08
-40 ... +40	C09
-40 ... +60	C10

Range table (°C)	Code
-50 ... +100	C11
-100 ... +60	C12
0 ... 50	C13
0 ... 60	C14
0 ... 80	C15
0 ... 100	C16
0 ... 120	C17
0 ... 150	C18
0 ... 160	C19
0 ... 200	C20

Range table (°C)	Code
0 ... 250	C21
0 ... 300	C22
0 ... 400	C23
0 ... 500	C24
0 ... 600	C25
0 ... 650	C26
50 ... 650	C27
100 ... 600	C28
100 ... 700	C29