
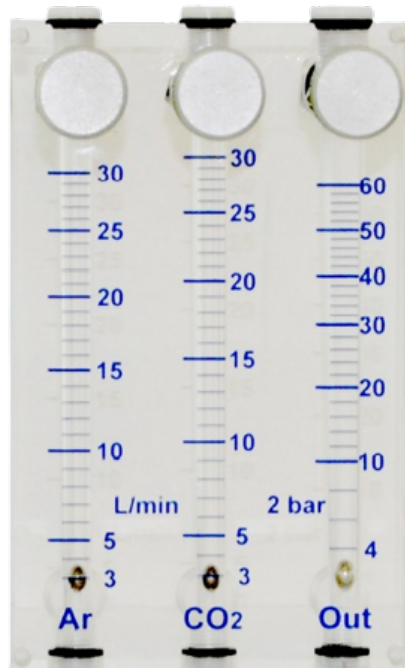


**A/M-2****A/M-3**

The plexiglas flowmeters a/m-2 and a/m-3 are measurers with more chamber of measure. They are suitable to control contemporarily 2 or 3 gases, they can be realized with independent input and output or inique output. Equipped with regulation valve in nickeled brass or AISI. Maximum working temperature: 55°C. Maximum working pressure: 10 bar. They are particularly proper for the use in gasotherapy, control of cryogenic gas, chromatography and analysis.

| GENERAL FEATURES     |                          |
|----------------------|--------------------------|
| Employment:          | Gas                      |
| Accuracy:            | ±5% del f.s.v.           |
| Maximum pressure:    | 10 bar                   |
| Maximum temperature: | 70°C                     |
| Measurer structure   | PMMA                     |
| Connection           | 1/4 or 3/8" GAS M square |

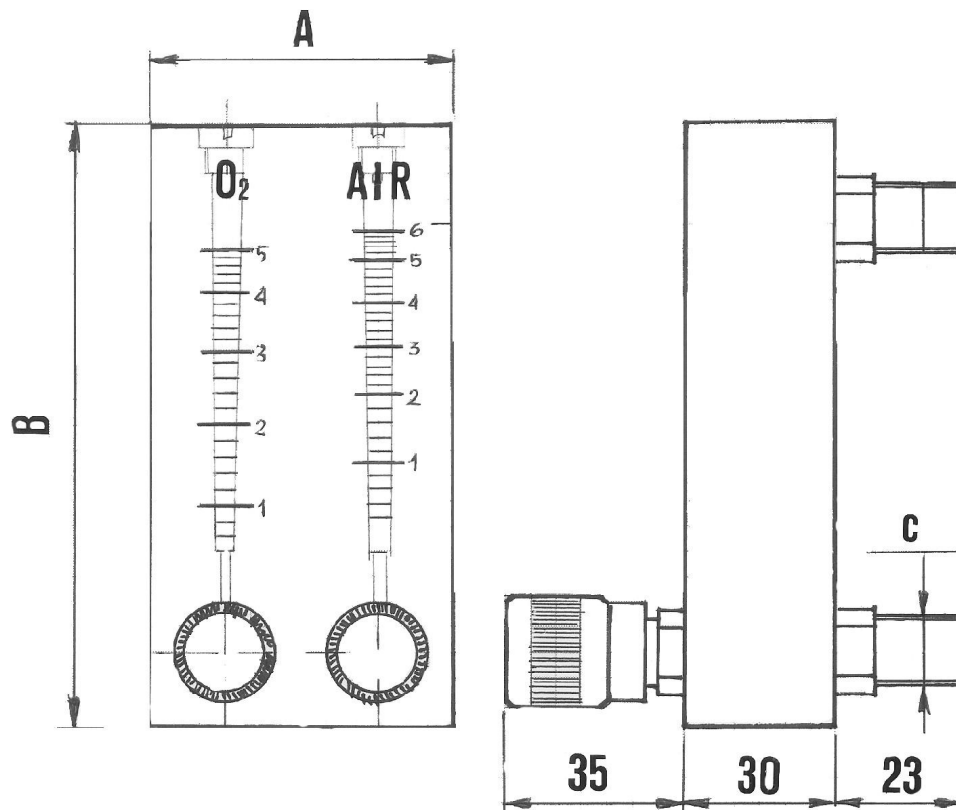

Standard reates for atmospheric output pressure

| Model     | A  | B   | C      | Range AIR – O <sub>2</sub> – N <sub>2</sub> O |
|-----------|----|-----|--------|-----------------------------------------------|
| a/m-2-145 | 60 | 145 | 1/8" F | 0,2 – 5 L/min                                 |
|           |    |     | 1/4" M | 0,5 – 10 L/min                                |
|           |    |     | 3/8" M | 1 – 15 L/min                                  |
| a/m-3-145 | 90 | 145 | 1/8" F | 0,2 – 5 L/min                                 |
|           |    |     | 1/4" M | 0,5 – 10 L/min                                |
|           |    |     | 3/8" M | 1 – 15 L/min                                  |
| a/m-2-185 | 60 | 185 | 1/8" F | 1 – 15 L/min                                  |
|           |    |     | 1/4" M | 2 – 20 L/min                                  |
|           |    |     | 3/8" M | 2 – 30 L/min                                  |
| a/m-3-185 | 90 | 185 | 1/8" F | 1 – 15 L/min                                  |
|           |    |     | 1/4" M | 2 – 20 L/min                                  |
|           |    |     | 3/8" M | 2 – 30 L/min                                  |